

FORM PTO-1390  
(REV 10-2000)

U.S. DEPARTMENT OF COMMERCE PATENT AND TRADEMARK OFFICE

ATTORNEY'S DOCKET NUMBER

TRANSMITTAL LETTER TO THE UNITED STATES  
DESIGNATED/ELECTED OFFICE (DO/EO/US)  
CONCERNING A FILING UNDER 35 U.S.C. 371

P-2351-US

U.S. APPLICATION NO. 09/780547 (37 CFR 1.55)

INTERNATIONAL APPLICATION NO.

PCT/IL00/00171

INTERNATIONAL FILING DATE

16 March 2000

PRIORITY DATE CLAIMED

17 March 1999

TITLE OF INVENTION SYSTEM AND METHOD FOR ROAMING FOR PREPAID MOBILE TELEPHONE SERVICE

APPLICANT(S) FOR DO/EO/US SOFER, Carmel ; WOLFMAN, Shlomo; and BIRAN, Ory

Applicant herewith submits to the United States Designated/Elected Office (DO/EO/US) the following items and other information:

1. ☒ This is a **FIRST** submission of items concerning a filing under 35 U.S.C. 371.
2. ☐ This is a **SECOND** or **SUBSEQUENT** submission of items concerning a filing under 35 U.S.C. 371.
3. ☒ This is an express request to promptly begin national examination procedures (35 U.S.C. 371(f)).
4. ☒ The US has been elected by the expiration of 19 months from the priority date (PCT Article 31).
5. ☒ A copy of the International Application as filed (35 U.S.C. 371(c)(2))
  - a. ☒ is attached hereto (required only if not communicated by the International Bureau).
  - b. ☐ has been communicated by the International Bureau.
  - c. ☐ is not required, as the application was filed in the United States Receiving Office (RO/US).
6. ☐ An English language translation of the International Application as filed (35 U.S.C. 371(c)(2)).
7. ☐ Amendments to the claims of the International Application under PCT Article 19 (35 U.S.C. 371(c)(3)).
  - a. ☐ are attached hereto (required only if not communicated by the International Bureau).
  - b. ☐ have been communicated by the International Bureau.
  - c. ☐ have not been made; however, the time limit for making such amendments has NOT expired.
  - d. ☐ have not been made and will not be made.
8. ☐ An English language translation of the amendments to the claims under PCT Article 19 (35 U.S.C. 371(c)(3)).
9. ☒ An oath or declaration of the inventor(s) (35 U.S.C. 371(c)(4)).
10. ☐ An English language translation of the annexes to the International Preliminary Examination Report under PCT Article 36 (35 U.S.C. 371(c)(5)).

Items 11. to 16. below concern document(s) or information included:

11. ☐ An Information Disclosure Statement under 37 CFR 1.97 and 1.98.
12. ☐ An assignment document for recording. A separate cover sheet in compliance with 37 CFR 3.28 and 3.31 is included.
13. ☒ A **FIRST** preliminary amendment.  
☐ A **SECOND** or **SUBSEQUENT** preliminary amendment.
14. ☐ A substitute specification.
15. ☐ A change of power of attorney and/or address letter.
16. ☒ Other items or information: 1) Postcard

09/700347

PCT/IL00/00171

- 17.
- ☒
- The following fees are submitted:

**BASIC NATIONAL FEE (37 CFR 1.492 (a) (1) - (5):**

Neither international preliminary examination fee (37 CFR 1.482)  
nor international search fee (37 CFR 1.445(a)(2)) paid to USPTO  
and International Search Report not prepared by the EPO or JPO.....\$1000.00

International preliminary examination fee (37 CFR 1.482) not paid to  
USPTO but International Search Report prepared by the EPO or JPO .....\$860.00

International preliminary examination fee (37 CFR 1.482) not paid to USPTO but  
international search fee (37 CFR 1.445(a)(2)) paid to USPTO .....\$710.00

International preliminary examination fee paid to USPTO (37 CFR 1.482)  
but all claims did not satisfy provisions of PCT Article 33(1)-(4).....\$690.00

International preliminary examination fee paid to USPTO (37 CFR 1.482)  
and all claims satisfied provisions of PCT Article 33(1)-(4).....\$100.00

**ENTER APPROPRIATE BASIC FEE AMOUNT =****CALCULATIONS PTO USE ONLY**

528 Rec'd PCT/PTO 16 NOV 2000

Surcharge of \$130.00 for furnishing the oath or declaration later than ☐ 20 ☐ 30  
months from the earliest claimed priority date (37 CFR 1.492(e)).

CLAIMS	NUMBER FILED	NUMBER EXTRA	RATE
Total claims	- 20 =		X \$18.00
Independent claims	5 - 3 =	2	X \$80.00
MULTIPLE DEPENDENT CLAIM(S) (if applicable)			+ \$270.00

**TOTAL OF ABOVE CALCULATIONS =**

- ☐ Applicant claims small entity status. See 37 CFR 1.27. The fees indicated above  
are reduced by 1/2.

**SUBTOTAL =**

Processing fee of \$130.00 for furnishing the English translation later than ☐ 20 ☐ 30  
months from the earliest claimed priority date (37 CFR 1.492(f)).

**TOTAL NATIONAL FEE =**

Fee for recording the enclosed assignment (37 CFR 1.21(h)). The assignment must be  
accompanied by an appropriate cover sheet (37 CFR 3.28, 3.31). \$40.00 per property +

**TOTAL FEES ENCLOSED =**

Amount to be refunded:	\$
charged:	\$ 850.00

- a. ☐ A check in the amount of \$\_\_\_\_\_ to cover the above fees is enclosed.
- b. ☒ Please charge my Deposit Account No. 05-0649 in the amount of \$850.00 to cover the above fees.  
A duplicate copy of this sheet is enclosed.
- c. ☒ The Commissioner is hereby authorized to charge any additional fees which may be required, or credit any  
overpayment to Deposit Account No. 05-0649. A duplicate copy of this sheet is enclosed.

**Note:** Where an appropriate time limit under 37 CFR 1.494 or 1.495 has not been met, a petition to revive (37 CFR 1.137(a) or (b)) must be filed and granted to restore the application to pending status.

SEND ALL CORRESPONDENCE TO:

**EITAN, PEARL, LATZER & COHEN-ZEDEK**

One Crystal Park, Suite 210

2011 Crystal Drive

Arlington, VA 22202-3709

Tel: (703) 486-0600 Fax: (703) 487-0800

SIGNATURE:

Jerome R. Smith, Jr.

NAME

35,684

REGISTRATION NUMBER

09/700547  
528 Rec'd PCT/PTO 16 NOV 2000

S/N:

PATENT  
P-2351-US

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

Applicant: C. SOFER et al. Examiner: Not assigned yet  
Serial No.: Not assigned yet Group Art Unit: Not assigned yet  
Filed: Herewith  
Title: SYSTEM AND METHOD FOR ROAMING FOR PREPAID MOBILE  
TELEPHONE SERVICE

---

PRELIMINARY AMENDMENT

Assistant Commissioner for Patents  
Washington, DC 20231

Sir:

Please amend the Patent application before examination, as follows:

In the Specification:

At page 7, line 7, after "call", add --if--.

At page 7, line 19, after "call", add --if--.

At page 13, line 6, delete "165" and replace it with --160--.

At page 15, line 10, delete "112" and replace it with --122--.

At page 17, line 9, delete "320" and replace it with --310--.

At page 18, line 12, after "(step 416).", add --If the balance is insufficient, IG 102 denies the service (step 418).--.

At page 19, line 7, after "104", add --(step 440)--.

APPLICANTS: SOFER et al.  
SERIAL NO.:  
FILED:  
Page 2

At page 19, line 20, delete "150" and replace it with --160--.

At page 19, line 20, delete "150" and replace it with --160--.

At page 20, line 17, delete "150" and replace it with --160--.

At page 20, line 18, delete "150" and replace it with --160--.

At page 20, line 18, delete "620" and replace it with --602--.

At page 20, line 18, delete "150" and replace it with --160--.

At page 20, line 20, delete "150" and replace it with --160--.

At page 20, line 21, delete "150" and replace it with --160--.

At page 20, line 21, delete "62" and replace it with --602--.

At page 20, line 22, delete "150" and replace it with --160--.

At page 21, line 4, delete "150" and replace it with --160--.

At page 21, line 16, delete "150" and replace it with --160--.

At page 21, line 19, delete "150" and replace it with --160--.

At page 21, line 20, delete "150" and replace it with --160--.

At page 22, line 2, delete "150" and replace it with --160--.

At page 22, line 4, delete "150" and replace it with --160--.

At page 22, line 5, delete "150" and replace it with --160--.

At page 22, line 8, delete "150" and replace it with --160--.

At page 22, line 9, delete "150" and replace it with --160--.

In the Claims:

At claim 8, line 4 of the claim, after "call", add --if--.

At claim 10, line 4 of the claim, after "call", add --if--.

APPLICANTS: SOFER et al.  
SERIAL NO.:  
FILED:  
Page 3

**Remarks**

In the Specification:

The Specification has been amended to correct grammatical and typographical errors and to match the figures.


In the Claims:

The amendments to the claims are editorial in nature.

No new material has been added. Admission of the foregoing amendments is respectfully requested.

Should the Examiner have any question or comment as to the form, content, or entry of this Paper, the Examiner is requested to contact the undersigned at the telephone number below. Similarly, if there are any further issues yet to be resolved to advance the prosecution of this Application to issue, the Examiner is requested to telephone the undersigned counsel.

Respectfully submitted,

  
Jerome R. Smith, Jr.  
Attorney for Applicant(s)  
Registration No. 35,684

Dated: November 16, 2000

Eitan, Pearl, Latzer & Cohen-Zedek  
One Crystal Park, Suite 210  
2011 Crystal Drive  
Arlington, VA 22202-3709, U.S.A.  
Telephone No.: (703) 486-0600  
Facsimile No.: (703) 486-0800

## SYSTEM AND METHOD FOR ROAMING FOR PREPAID MOBILE TELEPHONE

## SERVICE

## FIELD OF THE INVENTION

The present invention relates to mobile telephone networks, in general,  
5 and to providing prepaid mobile station service to users outside of their home  
mobile network, in particular.

## BACKGROUND OF THE INVENTION

Roaming agreements between wireless network operators enable their  
subscribers to use their mobile telephones when travelling in wireless networks  
10 whose operators are party to the agreement. Many wireless network operators  
offer mobile telephone users the option of being prepaid users. A prepaid user  
pays in advance for airtime and is given access to the services based on the  
user's account balance.

A seamless prepaid solution for users of mobile telephones roaming  
15 outside of their home mobile network requires access to each user's balance and  
call control capabilities by the network managing the call. Since operators are  
reluctant to expose their database to other networks and are missing  
infrastructure to manage these calls at the visited network, most operators define  
the prepaid users in a configuration that prevents registration outside the home  
20 mobile network.

The SICAP platform available from Swisscom of Switzerland offers  
prepaid service for outbound roaming. When a prepaid user is registered in a  
visited location register (VLR), the prepaid user is barred from making calls. To

place a call, the user must type in a special Unstructured Supplementary Service Data (USSD) code, followed by the dialed number. The SICAP platform in the home mobile network receives the USSD code and generates a call back to the prepaid user and to the desired destination. This service is not seamless and forces the user to enter codes, which may be difficult to remember and time-consuming and error-prone to enter. The prepaid user's telephone book cannot be used, since a prefix of the USSD code must be added. Most significantly, the prepaid user must wait for the callback and does not receive immediate service.

10 In some mobile network systems, the handset has a smart card that provides some of the functionality of the handset. In Global System for Mobile communications (GSM), the smart card is called a subscriber identification module (SIM). Some mobile network operators use the SIM toolkit (STK) to produce special SIM "smart cards" which manage the prepaid balance in real time. The SIM on the handset controls the termination of calls depending on the balance stored and can recharge the balance over the air. This service is more sensitive to fraud. Furthermore, it is hard to implement complex tariff tables and hard to differentiate between roaming networks.

Some clearinghouses offer almost real-time balance update, thus enabling control over balance usage. However, there is no guarantee of the call detail record (CDR) delivery time and balance update. Delays cause unauthorized calls after the balance is exhausted.

Some mobile network operators agree to customize their network components in a particular way in order to provide roaming for prepaid users,

however this solution is limited only to those operators who are party to the agreement.

The European Telecommunications Standards Institute (ETSI) has set a new GMS standard called Customized Applications for Mobile Networks Enhanced Logic (CAMEL). The standard specifies all the components needed to let GSM network operators offer the intelligent network (IN) services they supply in their home country to subscribers that roam on foreign networks. CAMEL requires an upgrade to the installed mobile network – replacing existing switches and other components with CAMEL-compliant versions. CAMEL also requires the installed mobile network to be integrated with a CAMEL-compliant service control point (SCP). This is an expensive and time-consuming procedure. Mobile network components that are compatible with CAMEL Phase 1 are commercially available and are slowly being introduced into mobile networks. CAMEL-compliant SCPs have had a less successful market penetration, due to the high price tag.

Throughout this specification and claims, the term "partially CAMEL-compliant network" is used to mean a mobile network having CAMEL-compliant versions of standard mobile network components such as switches and location registers but not having a CAMEL-compliant SCP. The term "fully CAMEL-compliant network" is used to mean a mobile network having CAMEL-compliant versions of standard mobile network components such as switches and location registers and having a CAMEL-compliant SCP.

CAMEL Phase 1 enables operators of fully CAMEL-compliant networks to offer simple telephony services to prepaid users who are roaming in a visited fully



CAMEL-compliant network. CAMEL Phase 1 does not enable roaming prepaid users to receive home-language announcements or to recharge the account balance during a call without disconnecting the call. Furthermore, when at least one of the home mobile network and the visited network is not fully CAMEL-compliant, then CAMEL Phase 1 does not provide a roaming solution for prepaid users.

## SUMMARY OF THE INVENTION

There is provided in accordance with a preferred embodiment of the present invention a system for enabling telephony services when roaming in a visited mobile network to a user subscribing to a home mobile network and having  
5 a prepaid account with a balance at the home mobile network. The system includes a home intelligent gateway integrated into the home mobile network, a visited intelligent gateway integrated into the visited mobile network, and a global packet switch network connected to the home intelligent gateway and to the visited intelligent gateway. The home intelligent gateway and the visited intelligent  
10 gateway are configured to communicate via the global packet switch network in order to manage the telephony services in real-time according to the balance.

Moreover, in accordance with a preferred embodiment of the present invention, the home mobile network has a prepaid system and the home intelligent gateway includes an interface to the prepaid system.

15 Furthermore, in accordance with a preferred embodiment of the present invention, the home intelligent gateway retrieves the balance via the interface, calculates an allowed call duration based upon the balance, and transfers the allowed call duration in time units to the visited intelligent gateway via the global packet switch network.

20 Additionally, in accordance with a preferred embodiment of the present invention, the system further includes a signaling connection control part signal relay point platform integrated into the home intelligent gateway for relaying signaling connection control part messages between the home mobile network and the visited mobile network.

There is also provided in accordance with a preferred embodiment of the present invention a method for enabling telephony services when roaming in a visited mobile network to a user subscribing to a home mobile network and having a prepaid account with a balance at the home mobile network. The method includes the step of communicating via a global packet switch network connecting a home intelligent gateway integrated into the home mobile network and a visited intelligent gateway integrated into the visited mobile network in order to manage the telephony services in real-time according to the balance.

There is also provided in accordance with a preferred embodiment of the present invention a method for registering a user subscribing to a home mobile network and roaming in a visited mobile network. The home mobile network has a home intelligent gateway integrated therein that is connected to a global packet switch network. The method includes the steps of refusing to register the user if the visited mobile network does not have a visited intelligent gateway integrated therein that is connected to the global packet switch network, and registering the user at the visited mobile network if the visited mobile network has a visited intelligent gateway integrated therein that is connected to the global packet switch network.

There is also provided in accordance with a preferred embodiment of the present invention a method for enabling telephony services when roaming in a visited mobile network to a user subscribing to a home mobile network and having a prepaid account with a balance at the home mobile network. The method includes the steps of registering the user in the visited mobile network, and placing mobile originated calls from the visited mobile network if a home intelligent

gateway integrated into the home mobile network communicates via a global packet switch network a sufficient allowed call duration to a visited intelligent gateway integrated into the visited mobile network.

Moreover, in accordance with a preferred embodiment of the present invention, the method further including the steps of enabling the user to recharge the balance during a mobile originated call, and enabling the user to continue the mobile originated call the balance has been sufficiently recharged.

There is also provided in accordance with a preferred embodiment of the present invention a method for enabling telephony services when roaming in a visited mobile network to a user subscribing to a home mobile network and having a prepaid account with a balance at the home mobile network. The method includes the steps of registering the user in the visited mobile network, and placing mobile terminated calls to the visited mobile network if the visited mobile network has a visited intelligent gateway integrated therein that is connected to the global packet switch network.

Moreover, in accordance with a preferred embodiment of the present invention, the method further includes the steps of enabling the user to recharge the balance during a mobile terminated call, and enabling the user to continue the mobile terminated call the balance has been sufficiently recharged.

## BRIEF DESCRIPTION OF THE DRAWINGS

The present invention will be understood and appreciated more fully from the following detailed description taken in conjunction with the appended drawings in which:

5           Fig. 1 is a schematic illustration of a system for roaming for prepaid users, according to a preferred embodiment of the present invention;

          Fig. 2 is a flowchart illustration of a method for registration of a roaming prepaid user, according to a preferred embodiment of the present invention;

10           Fig. 3 is a flowchart illustration of a method for enabling a mobile originated (MO) call for a roaming prepaid user, according to a preferred embodiment of the present invention;

          Figs. 4A and 4B are flowchart illustrations of a method for enabling a mobile terminated (MT) call for a roaming prepaid user, according to a preferred embodiment of the present invention;

15           Fig. 5 is a flowchart illustration of a method for registration of a roaming prepaid user, according to another preferred embodiment of the present invention;

          Figs. 6A and 6B are flowchart illustrations of a method for enabling an MO call for a roaming prepaid user, according to another preferred embodiment of the present invention;

20           Fig. 7 is a flowchart illustration of a method for enabling an MT call for a roaming prepaid user, according to another preferred embodiment of the present invention; and

Figs. 8A and 8B are flowchart illustrations of a method for enabling an MO call for a roaming prepaid user, according to yet another preferred embodiment of the present invention.

## DETAILED DESCRIPTION OF THE PRESENT INVENTION

The present invention is directed towards a system and method for enabling roaming to prepaid users. According to a preferred embodiment of the present invention, intelligent gateways connected via a global packet switch network are integrated into mobile networks. This configuration has previously been described, although not for the purpose of enabling roaming to prepaid users, in PCT publication WO 99/57914, published November 11, 1999. When a prepaid user subscribing to a home mobile network is roaming in a visited mobile network, the intelligent gateways communicate via the global packet switch network. This communication is used to manage both mobile originated (MO) calls and mobile terminated (MT) calls in real time according to the balance of the prepaid user's account at the home mobile network. This communication is also used to offer advanced services such as home-language announcements and recharging.

Reference is now made to Fig. 1, which is a schematic illustration of a system for roaming for prepaid users, according to a preferred embodiment of the present invention. A global packet switch network 100 connects an intelligent gateway (IG) 102, integrated in a home public land mobile network (HPLMN) 104, to an intelligent gateway 106, integrated in a visited public land mobile network (VPLMN) 108. When both HPLMN 104 and VPLMN 108 have intelligent gateways connected via global packet switch network 100, then a prepaid user subscribing to HPLMN 104 is able to roam in VPLMN 108, as will be described in further detail hereinbelow.

The voice path is typically sent over E1/T1 trunks, while signaling related to a particular call is sent using the ISDN user part (ISUP). An international carrier 109 connects HPLMN 104 and VPLMN 108, enabling both a voice path connection and ISUP signaling between HPLMN 104 and VPLMN 108. Signaling  
5 related to mobility management is accomplished through the mobile application part (MAP) carried over a backbone network 111. One of the layers under MAP is the signaling connection control part (SCCP).

HPLMN 104 comprises a home mobile switching center (MSC-H) 110 connected to IG 102 via ISUP and E1 connections and via MAP, a home location  
10 register (HLR) 112 connected to IG 102 via MAP, a prepaid system 114 connected to IG 102 via a local area network (LAN) connection, and a gateway mobile switching center (MSC-G) 116 connected to international carrier 109 via ISUP and E1 connections.

Similarly, VPLMN 108 comprises a visited mobile switching center  
15 (MSC-V) 120 connected to IG 106 via ISUP and E1 connections and via MAP, a visited location register (VLR) 122 connected to IG 106 via MAP, and a gateway mobile switching center (MSC-G) 126 connected to international carrier 109 via ISUP and E1 connections.

It will be appreciated that obviously HPLMN 104 has its own VLR for  
20 handling roaming subscribers of other network operators, and that VPLMN 108 has its own HLR for handling its own subscribers, however, these are not referred to in the description of the present invention.

IG 102 comprises a database 130 storing user profile data and possibly a roaming tariffs table, and an application 132 for calculating call durations and for



managing calls. IG 102 also comprises a prepaid system interface 131 for interfacing with prepaid system 114. Similarly, IG 106 comprises a database 140 caching user profile data and call duration information and an application 142 for managing calls.

5 A roaming solution for prepaid users needs to address the following basic functionality: registration, making mobile originated (MO) calls, and receiving mobile terminated (MT) calls. A seamless roaming solution for prepaid users provides in addition to the basic functionality announcements in the user's home language and the possibility of recharging the account balance in the midst of a  
10 call.

The preferred embodiments of the present invention described hereinbelow provide seamless roaming solutions for prepaid users in the following scenarios:

(a) VPLMN 108 is neither fully CAMEL-compliant nor partially CAMEL  
15 compliant, regardless of the status of HPLMN 104;

(b) HPLMN 104 is fully CAMEL-compliant and its operator is willing and able to use the service creation environment (SCE) to prepare scripts as part of the seamless roaming for prepaid solution, and VPLMN 108 is either partially CAMEL-compliant or fully CAMEL-compliant;

20 (c) HPLMN 104 is partially CAMEL-compliant, and VPLMN 108 is either partially CAMEL-compliant or fully CAMEL-compliant;

(d) HPLMN 104 is neither fully CAMEL-compliant nor partially CAMEL compliant, and VPLMN 108 is either partially CAMEL-compliant or fully CAMEL-compliant; and

(e) HPLMN 104 is fully CAMEL-compliant but its operator is not willing nor able to use the SCE to prepare scripts as part of the seamless roaming for prepaid solution, and VPLMN 108 is either partially CAMEL-compliant or fully CAMEL-compliant.

5 In scenarios (b) and (e), where HPLMN 104 is fully CAMEL-compliant, HPLMN 104 comprises a CAMEL-compliant service control point (SCP) 165. In scenarios (a), (c), (d) and (e), IG 102 is integrated with a SCCP signal relay point (SSRP) platform 150, as will be explained hereinbelow.

10 It will be appreciated that in the specific instances of scenarios (b) and (e) where both HPLMN 104 and VPLMN 108 are fully CAMEL-compliant, a roaming solution for prepaid users exists (using CAMEL Phase 1) without the present invention, but it is primitive and not seamless. The present invention is directed towards providing a seamless roaming solution for prepaid users in these specific instances.

15 It will also be appreciated that in all other instances, including instances of scenarios (b) and (e) where VPLMN 108 is only partially CAMEL-compliant, no roaming solution for prepaid users exists. The present invention is directed towards providing a seamless roaming solution for prepaid users in these other instances.

20 A very important feature of the present invention is that it enables a prepaid subscriber of any mobile network having an intelligent gateway connected to global packet switch network 100 to roam in any other mobile network having an intelligent gateway connected to global packet switch network 100. The operators

of the mobile networks do not have to make agreements between themselves in order to offer roaming for prepaid subscribers.

### Scenario (a) – Registration

Reference is now made to Fig. 2, which is a flowchart illustration of a method for registration of a roaming prepaid user, according to a preferred embodiment of the present invention, applicable to scenario (a). The roaming prepaid user is a subscriber of HPLMN 104 and is visiting in a visited mobile network. The roaming prepaid user turns on the mobile station, which tries to register with the VLR of the visited mobile network (step 200). The VLR sends the update location (UL) request to HPLMN 104 via international carrier 109, following standard GSM procedure (step 202).

MSC-G 116 receives the UL request message from international carrier 109. As mentioned hereinabove, in scenario (a) IG 102 is integrated with SSRP platform 150. MSC-G 116 is configured so that all MGT based messages (authentication and update location processes) are routed to SSRP 150 instead of to HLR 112. As a result, IG 102 receives the UL request message (step 204). IG 102 seamlessly passes on to HLR 112 UL request messages belonging to postpaid users (step 206).

Alternatively, if the operator of HPLMN 104 reserves a special international mobile subscriber identity (IMSI) range for prepaid users, then MSC-G 116 is configured so that MGT based messages based on IMSIs within that range are routed to SSRP 150 instead of to HLR 112. As a result IG 102 receives UL request messages for prepaid users only. This replaces steps 204 and 206.

IG 102 rejects UL requests of prepaid users coming from visited mobile networks not having intelligent gateways, sending the rejection to the VLR via MSC-G 116 (step 208).

For UL requests of prepaid users coming from visited mobile networks having an intelligent gateway, for example VPLMN 108, IG 102 relays to HLR 112 the UL request with a modified SCCP origination address. The modified SCCP origination address is set to SSRP 150, so that HLR 112 thinks that at the SCCP level, the UL request originated at SSRP 150. At TCAP and MAP levels, HLR 112 thinks that the UL request originated at VLR 122. As a result, HLR 112 records the correct address of VLR 112 as the current location of the roaming prepaid user, but all messages relating to this dialogue are now relayed through SSRP 150 (step 210).

HLR 112 sends a UL acceptance response and user profile data back to VPLMN 108 (step 212). As the information passes through SSRP 150, IG 102 inserts an operator determined barring (ODB) on call forwarding unconditional (CFU) supplementary services. This means that while roaming, the prepaid user cannot change the CFU settings.

Finally, IG 102 issues a CFU command to HLR 112 to route all incoming (mobile terminated) calls to IG 102 (step 214).

#### 20 Scenario (a) – Mobile Originated (MO) Calls

Reference is now made to Fig. 3, which is a flowchart illustration of a method for enabling a mobile originated (MO) call for a roaming prepaid user, according to a preferred embodiment of the present invention, applicable to

scenario (a). The roaming prepaid user is a subscriber of HPLMN 104 and is visiting in a visited mobile network.

The roaming prepaid user dials the requested number (step 300). Since the roaming prepaid user's mobile station is registered in VLR 122, MSC-V 120  
5 handles the MO call. MSC-V 120 routes the call to IG 106 (step 302).

According to a preferred embodiment of the present invention, HPLMN 104 reserves a special international mobile subscriber identity (IMSI) range for prepaid users, and MSC-V 120 is configured to route all MO calls from roamers having IMSIs within that range to visited IG 106. Alternatively, if VPLMN 108 is  
10 equipped with Capability Set 1 (CS1), then MSC-V 120 is configured to query IG 106 using intelligent network application part (INAP) whether the roaming prepaid user is allowed to make an MO call. Alternatively, MSC-V 120 is configured to route all MO calls from roamers subscribing to HPLMN 104 to IG 106. In this last embodiment, IG 106 releases and redirects MO calls from postpaid roamers.

15 IG 106 queries IG 102 via global packet switch network 100 for the allowed call duration (step 304). IG 102 retrieves the account balance for the prepaid user from prepaid system 114 using prepaid system interface 131, calculates the allowed call duration using tariffs information in database 130, and returns the allowed call duration to IG 106, where it is stored in database 140  
20 (step 306).

IG 106 checks whether the balance is sufficient (step 308). If it is, then IG 106 places the out call on behalf of the prepaid user via MSC-V 120 (step 310). IG 106 retains full control of the MO call. During the call (or at the end of the call), IG 106 updates IG 102 via global packet switch network 100 with the actual call

duration. IG 102 calculates the required charge using tariffs information in database 130 and using prepaid system interface 131 sends a decrease balance command to prepaid system 114 for the appropriate amount (step 312). At the end of the call, IG 106 generates a call details record (CDR) for billing (step 314).

5 If the balance is insufficient, then IG 106 denies the outgoing call service to the prepaid user and plays an error message suggesting that the user connect to customer care for recharging of the balance (step 316). Alternatively, IG 106 could enable the prepaid user to recharge the balance (step 318) and possibly continue with placing the call (step 320) once the balance has been recharged.

10 **Scenario (a):— Mobile Terminated (MT) Calls**

Reference is now made to Figs. 4A and 4B, which is a flowchart illustration of a method for enabling a mobile terminated (MT) call for a roaming prepaid user, according to a preferred embodiment of the present invention, applicable to scenario (a). The roaming prepaid user is a subscriber of HPLMN 104 and is roaming in VPLMN 108.

MSC-G 116 receives an incoming call for the prepaid user and queries HLR 112 for the user's location, following standard GSM procedure (step 400). Since the user's profile at HLR 112 has a CFU to IG 102 (see Fig. 2, step 214), HLR 112 directs MSC-G 116 to forward the call to IG 102, and MSC-G 116  
20 queries IG 102 for the user's location (step 402). IG 102, which has recorded in database 130 that the prepaid user is currently roaming in VPLMN 108, retrieves the current balance from prepaid system 114 and calculates the allowed call duration using tariffs information in database 130 (step 404). IG 102 checks whether the balance is sufficient (step 406). If it is, then IG 102 queries MSC-V

120 and VLR 122 for the mobile station roaming number (MSRN) of the prepaid user, substituting the SS7 address of SSRP 150 at the SCCP level of the query, but retaining the address of HLR 112 at the TCAP and MAP levels (step 408). MSC-V 120 and VLR 122 respond with the MSRN of the prepaid user (step 410).

5 Then IG 102 places the MT call to the user via MSC-G 116 (step 412).

IG 102 retains full control of the MT call. During the call (or at the end of the call), IG 106 updates IG 102 via global packet switch network 100 with the actual call duration. IG 102 calculates the required charge using tariffs information in database 130 and using prepaid system interface 131 sends a  
10 decrease balance command to prepaid system 114 for the appropriate amount (step 414). At the end of the call, IG 106 generates a call details record (CDR) for billing (step 416).

Two exceptions for MT calls that need to be dealt with: the roaming prepaid user is detached but is still physically present in the same VPLMN 108;  
15 and the prepaid user has returned to HPLMN 104 or has registered in a different visited mobile network. In both of these cases, MSC-V 120 and VLR 122 return a "User Absent" response to IG 102 (step 420). At this point, IG 102 instructs HLR 112 to remove the CFU to IG 102 (step 422). IG 102 then queries HLR 112 for the location of the prepaid user (step 424).

20 If HLR 112 still shows that the prepaid user is registered in VLR 122, then HLR 112 queries MSC-V 120 and VLR 122 for the MSRN of the prepaid user (step 426). MSC-V 120 and VLR 122 return a "User Absent" response to HLR 112, because the prepaid user is detached (step 428), and HLR 112 responds to the query of step 424 with the "User Absent" response (step 430). IG 102 then

restores the CFU at HLR 112 (step 432) and denies the service of an MT call (step 434).

If HLR 112 shows that the prepaid user has returned to the home network, then HLR 112 responds to the query of step 424 with the user's MSRN (step 436). IG 102 recognizes the MSRN as being local (step 438) and returns the MSRN to MSC-G 116 so that the MT call can be placed locally in HPLMN 104.

It will be appreciated that although the detailed description hereinabove with respect to scenario (a) is provided for GSM networks, the solutions are equally applicable to non-GSM networks.

#### Scenarios (b) and (c) – Registration

Reference is now made to Fig. 5, which is a flowchart illustration of a method for registration of a roaming prepaid user, according to a preferred embodiment of the present invention, applicable to scenarios (b) and (c). The roaming prepaid user is a subscriber of HPLMN 104 and is visiting in a visited mobile network.

As a preliminary requirement, every prepaid user subscribing to HPLMN 104 has origination-CAMEL subscription information (O-CSI) and termination-CSI (T-CSI) records in the user profile data stored in HLR 112. The O-CSI and T-CSI records include a setting of the gsmSCF address to the SS7 address of SCP 150 in the case of scenario (b) and the SS7 address of home IG 102 in the case of scenario (c). The implication of this setting is that every MO and-MT call will trigger a CAP query sent to the component whose address is contained in the gsmSCF variable.



The roaming prepaid user turns on the mobile station, which tries to register with the VLR of the visited mobile network (step 500). The VLR sends the update location (UL) request to HPLMN 104 via international carrier 109, following standard GSM procedure (step 502). All UL requests are accepted and HLR 112 sends a UL acceptance response and user profile data back to VPLMN 108 (step 504).

### Scenarios (b) and (c) – Mobile Originated (MO) Calls

Reference is now made to Figs. 6A and 6B, which are flowchart illustrations of a method for enabling a mobile originated (MO) call for a roaming prepaid user, according to a preferred embodiment of the present invention, applicable to scenarios (b) and (c). The roaming prepaid user is a subscriber of HPLMN 104 and is visiting in a visited mobile network.

The roaming prepaid user dials the requested number (step 300). Since the roaming prepaid user's mobile station is registered in VLR 122, MSC-V 120 handles the MO call.

In scenario (b), the user profile data stored in VLR 122 has an O-CSI with gsmSCF address set to the address of SCP 150. Therefore MSC-V 120 initiates a CAP transaction to SCP 150 via backbone network 111 (step 620). SCP 150 disconnects the call if the visited mobile network does not have an intelligent gateway (step 604). SCP 150 checks its database for the address of IG 106 (step 606). SCP 150 responds to the CAP transaction of step 62 with the address of IG 106 (step 608). Steps 604 - 608 require changes to SCP 150 that the operator of HPLMN 104 can accomplish by writing scripts using SCE.

In scenario (c), the user profile data stored in VLR 122 has an O-CSI with gsmSCF address set to the address of IG 102. Accordingly, in scenario (c), steps 602, 604, 606 and 608 are replaced by steps 602', 604', 606' and 608', respectively, with SCP 150 replaced by IG 102.

5 Then MSC-V 120 routes the call to IG 106 (step 302). From this point on, the MO call is handled as described hereinabove with respect to Fig. 3.

#### Scenarios (b) and (c) – Mobile Terminated (MT) Calls

Reference is now made to Fig. 7, which is a flowchart illustration of a method for enabling a mobile terminated (MT) call for a roaming prepaid user, according to a preferred embodiment of the present invention, applicable to  
10 scenarios (b) and (c). The roaming prepaid user is a subscriber of HPLMN 104 and is roaming in VPLMN 108.

MSC-G 116 receives an incoming call for the prepaid user and queries HLR 112 for the user's location, following standard GSM procedure (step 700). In  
15 scenario (b), the user profile data stored in HLR 112 has a T-CSI with gsmSCF address set to the address of SCP 150. In scenario (c), the user profile data stored in HLR 112 has a T-CSI with gsmSCF address set to the address of IG 102. Therefore HLR 112 directs MSC-G 116 to initiate a CAP transaction with SCP 150 for scenario (b) and IG 102 for scenario (c) (step 702).

20 SCP 150 (IG 102) retrieves the location of the user (which, if the user is roaming, is the address of VLR 122) from HLR 112 (step 704). In some configurations, HLR 112 includes the location of the user in its response to MSC-G 116 in step 702. If this does not automatically happen, then it is possible to turn on the Location Information Interrogation Indicator in the prepaid user's

profile in HLR 112 so that HLR 112 is forced to include the location of the user in its response to MSC-G 116 in step 702. Alternatively, SCP 150 (IG 102) queries HLR 112 directly for the user's location.

SCP 150 (IG 102) checks whether the prepaid user is roaming. If not, SCP 150 (IG 102) instructs MSC-G 116 to continue to place the call via MSC-H 110. However, if the prepaid user is roaming in a visited network which does not have an intelligent gateway connected to global packet switch network 100, then SCP 150 (IG 102) instructs MSC-G 116 to deny the call (step 706).

Otherwise, SCP 150 (IG 102) instructs MSC-G 116 to connect to a port of IG 102 (step 708). Then IG 102 queries HLR 112 with a T-CSI suppressed query for the location of the prepaid user and receives an MSRN (step 710). Using the MSRN, IG 102 routes the MT call to the user (step 712) while handling and monitoring the call (step 714). While handling the call, IG 102 can provide announcements and/or tones at every stage of the call, advanced recharging capabilities, etc.

#### Scenario (d) -- Registration

Registration in scenario (d) is performed according to the method described hereinabove with respect to Fig. 2, with the following changes. In step 212, HLR 112 sends a UL acceptance response and user profile data back to VPLMN 108. As the information passes through SSRP 150, IG 102 inserts an operator determined barring (ODB) on call forwarding unconditional (CFU) supplementary services. This means that while roaming, the prepaid user cannot change the CFU settings. IG 102 also inserts an O-CSI record in the user profile data sent back to VPLMN 108. This O-CSI record includes a setting of the

gsmSCF address to the SS7 address of IG 102 or 106. The implication of this setting is that every MO call will trigger a CAP query sent to the component whose address is contained in the gsmSCF variable. Setting gsmSCF to IG 106 is more cost-effective than setting gsmSCF to IG 102, but the technical solution is the same:

#### Scenario (d) – Mobile Originated (MO) Calls

Reference is now made to Figs. 8A and 8B, which are flowchart illustrations of a method for enabling a mobile originated (MO) call for a roaming prepaid user, according to a preferred embodiment of the present invention, applicable to scenario (d). The roaming prepaid user is a subscriber of HPLMN 104 and is visiting in a visited mobile network.

The roaming prepaid user dials the requested number (step 300). Since the roaming prepaid user's mobile station is registered in VLR 122, MSC-V 120 handles the MO call.

In scenario (d), the user profile data stored in VLR 122 has an O-CSI with gsmSCF address set to the address of either IG 102 or IG 106. In the case of IG 102, the method continues from step 602' as described hereinabove with respect to Fig. 6. In the case of IG 106, MSC-V 120 initiates an internal CAP transaction to IG 106 (step 802). IG 106 responds to the CAP transaction with instructions to MSC-V 120 to route the call to IG 106 (step 808). The method continues from step 302 as described hereinabove with respect to Fig. 3.

#### Scenario (d) – Mobile Terminated (MT) Calls

Mobile Terminated calls in scenario (d) are performed according to the method described hereinabove in Figs. 4A and 4B.

### Scenario (e) – Registration

Registration in scenario (e) is performed according to the method described hereinabove with respect to Fig. 2, with the following changes. In step 212, HLR 112 sends a UL acceptance response and user profile data back to VPLMN 108. As the information passes through SSRP 150, IG 102 inserts an O-CSI record and a T-CSI record in the user profile data sent back to VPLMN 108. The O-CSI and T-CSI records include a setting of the gsmSCF address to the SS7 address of IG 102. The implication of this setting is that every MO and MT call will trigger a CAP query to IG 102. Alternatively, for a more cost-effective solution, the O-CSI record could include a setting of the gsmSCF address to the SS7 address of IG 106.

According to a preferred embodiment of the present invention, instead of having IG 102 insert the O/T-CSI records, these records are provided as a preliminary requirement for every prepaid user subscribing to HPLMN 104.

### Scenario (e) – Mobile Originated (MO) Calls

Mobile Originated calls in scenario (e) are performed according to the method described hereinabove in Figs. 8A and 8B.

### Scenario (e) – Mobile Terminated (MT) Calls

Mobile Terminated calls in scenario (e) are performed according to the method described hereinabove in Fig. 7, where the CAP transactions are initiated to IG 102, as in scenario (e).

### Phone-less Roaming

According to another aspect of the present invention, a prepaid user roaming in a visited mobile network having an intelligent gateway connected to

global packet switch network 100 is able to make calls even without having the mobile station. The user profile data at the home intelligent gateway includes a roaming password for this purpose. When situated outside of HPLMN 104, the prepaid user calls a common access number, provides the mobile station  
5 international subscriber directory number (MSISDN) and a roaming password, and if authorized, uses the balance to place calls from any telephone.

### Prepaid System Interface

As described hereinabove, after IG 106 queries IG 102 via global packet switch network 100 for the allowed call duration, IG 102 retrieves the account  
10 balance for the prepaid user from prepaid system 114 using prepaid system interface 131, calculates the allowed call duration using tariffs information in database 130, and returns the allowed call duration to IG 106.

Prepaid system interface 131 enables IG 102 to retrieve a user balance and to decrease a user balance by a given monetary amount, regardless of the  
15 vendor of prepaid system 114, the basic architecture and the currency. If prepaid system 114 manages the roaming tariffs table internally, then database 130 does not store a roaming tariffs table, and prepaid system interface 131 enables IG 102 to query prepaid system 114 for the relevant tariff.

Preferably, prepaid system interface 131 uses the administrative  
20 customer care call center system local area network (LAN) protocol. Alternatively, if prepaid system 114 is intelligent network (IN) based, an IN application part (INAP) interface can be used, although the same LAN connection will suffice. If an INAP interface is used, then application 132 is capable of presenting IG 102 to prepaid system 114 as a service switching function (SSF) and a visited mobile

switch center using an SS7 address, and is capable of handling INAP commands and a session between IG 102 and prepaid system 114.

### Tariffs Handling

IG 102 is able to support separate roaming tariff tables for each visited  
5 network. Each table can support several tariff profiles to be chosen from according to the user profile, time of day and date. Since it is per network based, the time difference between networks can be embedded seamlessly using the home time as a baseline (unless the visited network covers multiple time zones). Each tariff profile includes at least the following fields: initial charge unit length,  
10 initial charge unit rate, additional charge unit length and additional charge unit rate. Application 132 uses both charges to calculate allowed call duration and amount of credit consumed de facto.

### Security

Since the present invention involves real-time charging and money  
15 storage and control, it needs to be secured in a way that does not expose the prepaid user accounts to additional risks. Furthermore, the present invention should be designed in such a way so that the tariffs and policies of HPLMN 104 are hidden from visited mobile networks.

Therefore, according to a preferred embodiment of the present  
20 invention, the visited IG 106 caches an identification of the prepaid user and the user's profile data. Furthermore, the user's balance is never cached in any intelligent gateway. Rather, a retrieved balance is used for a real-time calculation of allowed call duration and then immediately deleted from the intelligent gateway's application 132. If for seamless usage it is required to start the session

faster than the response time of prepaid system 114, it is recommended to do so by allocating a grace period until the real balance is obtained rather than caching the last call's remaining balance. The algorithm may be improved by an additional flag (go/no go only) calculated after the last call from the remaining balance and safety interval chosen by the operator of HPLMN 104. Finally, both intelligent gateways can query or update each other only by time units, i.e. the call duration will always be calculated at the home network and balance updates will always be stated in time units at the visited IG and translated to local currency only at the home IG.

#### Fraud Prevention

Basic fraud prevention capabilities should be incorporated into the present invention:

- A prepaid user is not allowed to maintain more than a single telephone call at a given time.
- A prepaid user is not allowed to place or receive consecutive telephone from or to visited mobile networks unless a reasonable time has elapsed. This functionality will be setup in the home intelligent gateway according to the preferences of the home network operator.
- A prepaid user is not allowed to consume more than M amounts of money in less than T seconds (where M and T are system parameters) as well as an optional limit on the call duration of a single call.

In addition, a commercially available fraud prevention utility (profiler) can be added to the system to prevent illegal exploitation of the access to the prepaid system. The profiler uses activity records provided by the roaming for prepaid



application and the billing CDRs as well as global information available from the users' location database to efficiently protect the system from malicious usage. When fraud or any other malicious activity is suspected, the home network should issue an appropriate warning. All incoming calls should then be rejected and  
5 outgoing calls should be routed to the customer care regardless of the destination number.

It will be appreciated by persons skilled in the art that the present invention is not limited by what has been particularly shown and described herein above. Rather the scope of the invention is defined by the claims that follow:

What is claimed is:

1. A system for enabling telephony services when roaming in a visited mobile network to a user subscribing to a home mobile network and having a prepaid account with a balance at said home mobile  
5 network, the system comprising:  
a home intelligent gateway integrated into said home mobile network;  
a visited intelligent gateway integrated into said visited mobile network; and  
a global packet switch network connected to said home intelligent  
10 gateway and to said visited intelligent gateway,  
said home intelligent gateway and said visited intelligent gateway configured to communicate via said global packet switch network in order to manage said telephony services in real-time according to said balance.
2. The system of claim 1, wherein said home mobile network has a  
15 prepaid system and said home intelligent gateway includes an interface to said prepaid system.
3. The system of claim 2, wherein said home intelligent gateway is configured to retrieve said balance via said interface, to calculate an allowed call duration based upon said balance, and to transfer said  
20 allowed call duration in time units to said visited intelligent gateway via said global packet switch network.
4. The system of claim 1, wherein said system further comprises a signaling connection control part signal relay point platform integrated into said home intelligent gateway for relaying signaling

connection control part messages between said home mobile network and said visited mobile network.

5. A method for enabling telephony services when roaming in a visited mobile network to a user subscribing to a home mobile network and having a prepaid account with a balance at said home mobile network, the method comprising the step of:

communicating via a global packet switch network connecting a home intelligent gateway integrated into said home mobile network and a visited intelligent gateway integrated into said visited mobile network in order to manage said telephony services in real-time according to said balance.

6. A method for registering a user subscribing to a home mobile network and roaming in a visited mobile network, said home mobile network having a home intelligent gateway integrated therein that is connected to a global packet switch network, the method comprising the steps of:

refusing to register said user if said visited mobile network does not have a visited intelligent gateway integrated therein that is connected to said global packet switch network; and

registering said user at said visited mobile network if said visited mobile network has a visited intelligent gateway integrated therein that is connected to said global packet switch network.

7. A method for enabling telephony services when roaming in a visited mobile network to a user subscribing to a home mobile network and

having a prepaid account with a balance at said home mobile network, the method comprising the steps of:

registering said user in said visited mobile network; and

placing mobile originated calls from said visited mobile network if a home intelligent gateway integrated into said home mobile network communicates via a global packet switch network a sufficient allowed call duration to a visited intelligent gateway integrated into said visited mobile network.

8. The method of claim 7, the method further comprising the steps of:

enabling said user to recharge said balance during a mobile originated call; and

enabling said user to continue said mobile originated call said balance has been sufficiently recharged.

9. A method for enabling telephony services when roaming in a visited mobile network to a user subscribing to a home mobile network and having a prepaid account with a balance at said home mobile network, the method comprising the steps of:

registering said user in said visited mobile network; and

placing mobile terminated calls to said visited mobile network if said visited mobile network has a visited intelligent gateway integrated therein that is connected to said global packet switch network.

10. The method of claim 9, the method further comprising the steps of:

enabling said user to recharge said balance during a mobile terminated call; and

enabling said user to continue said mobile terminated call said  
balance has been sufficiently recharged.

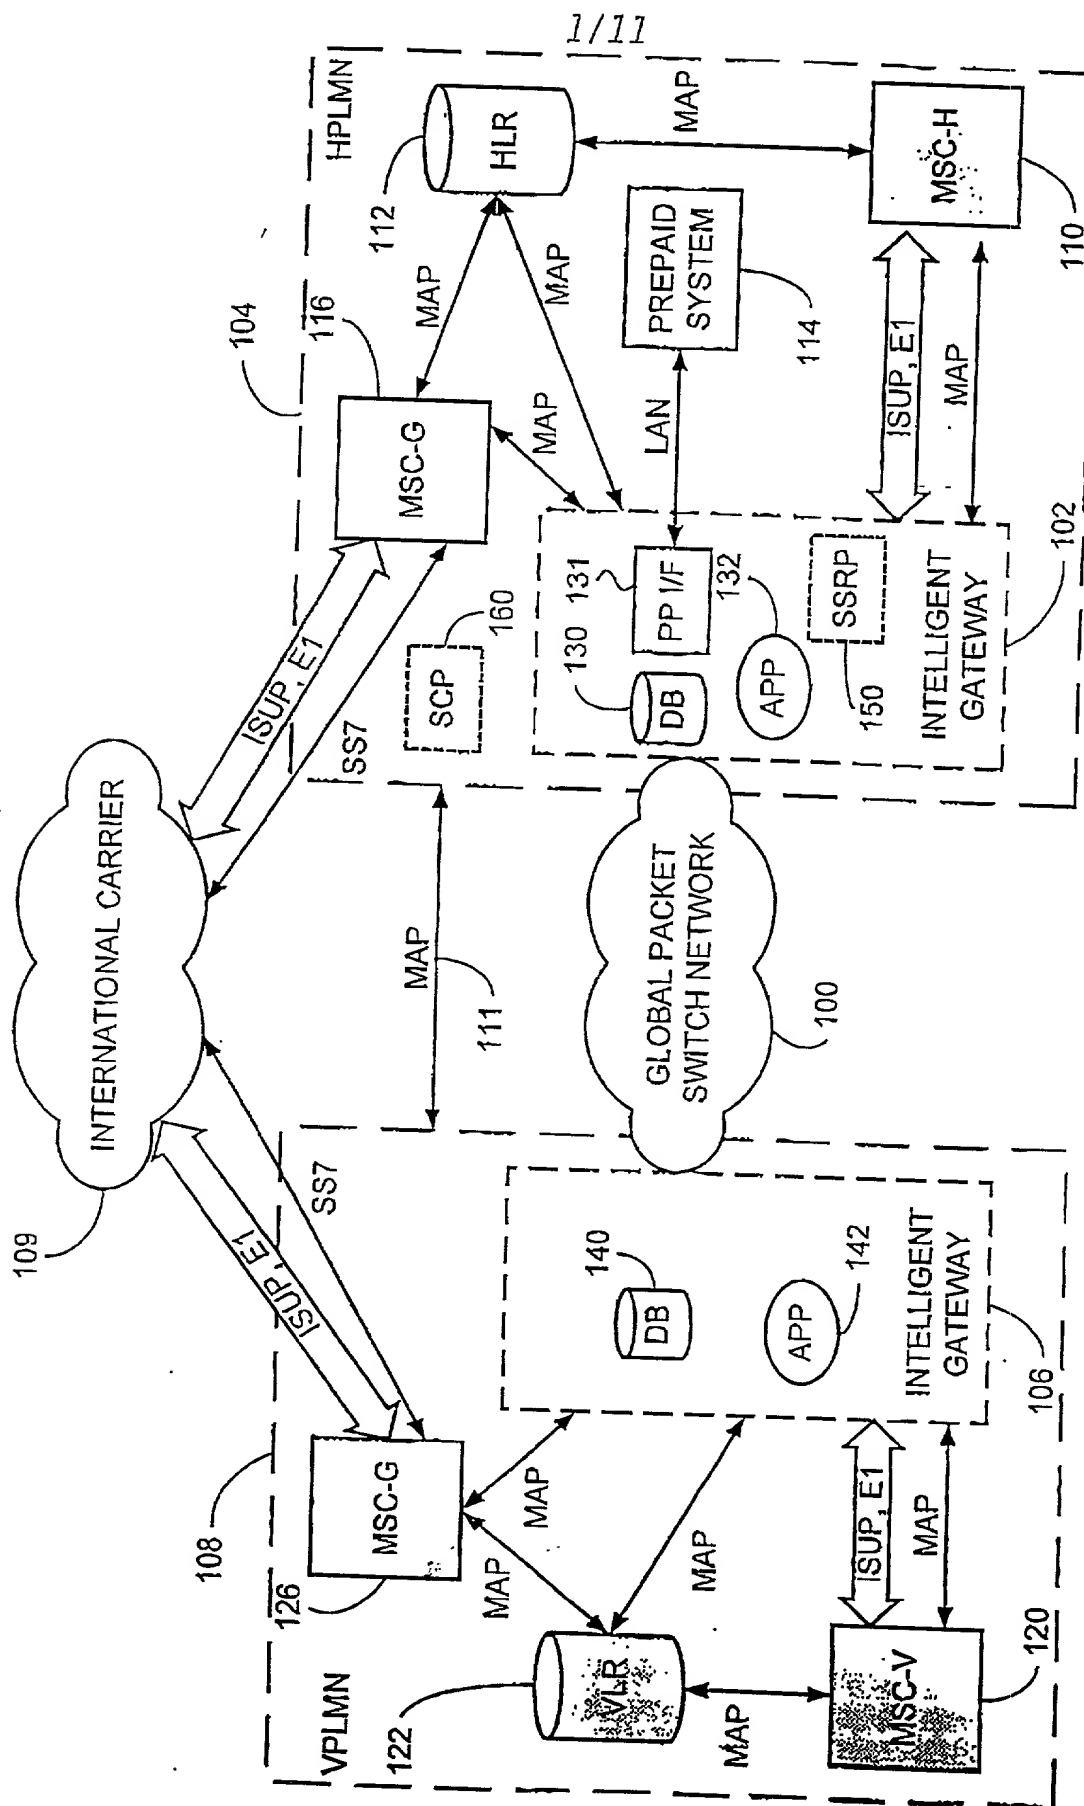


FIG. 1

2/11

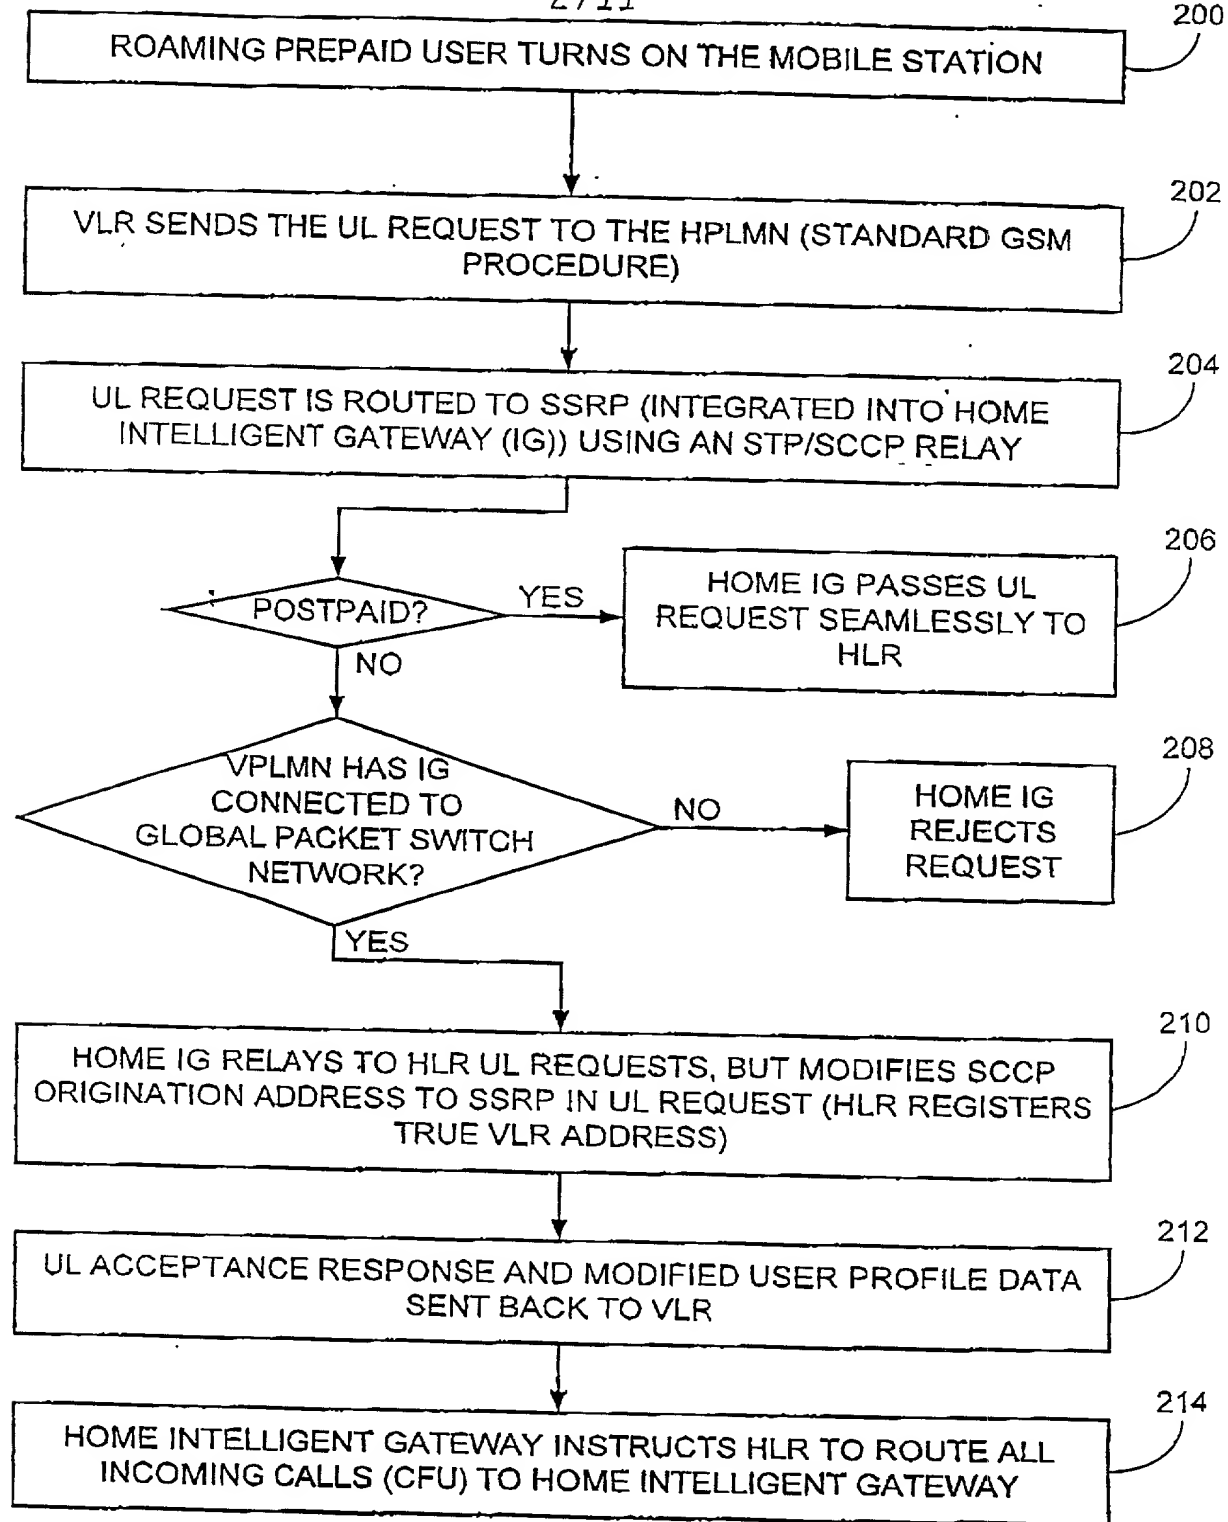


FIG. 2

09/700547

3/11

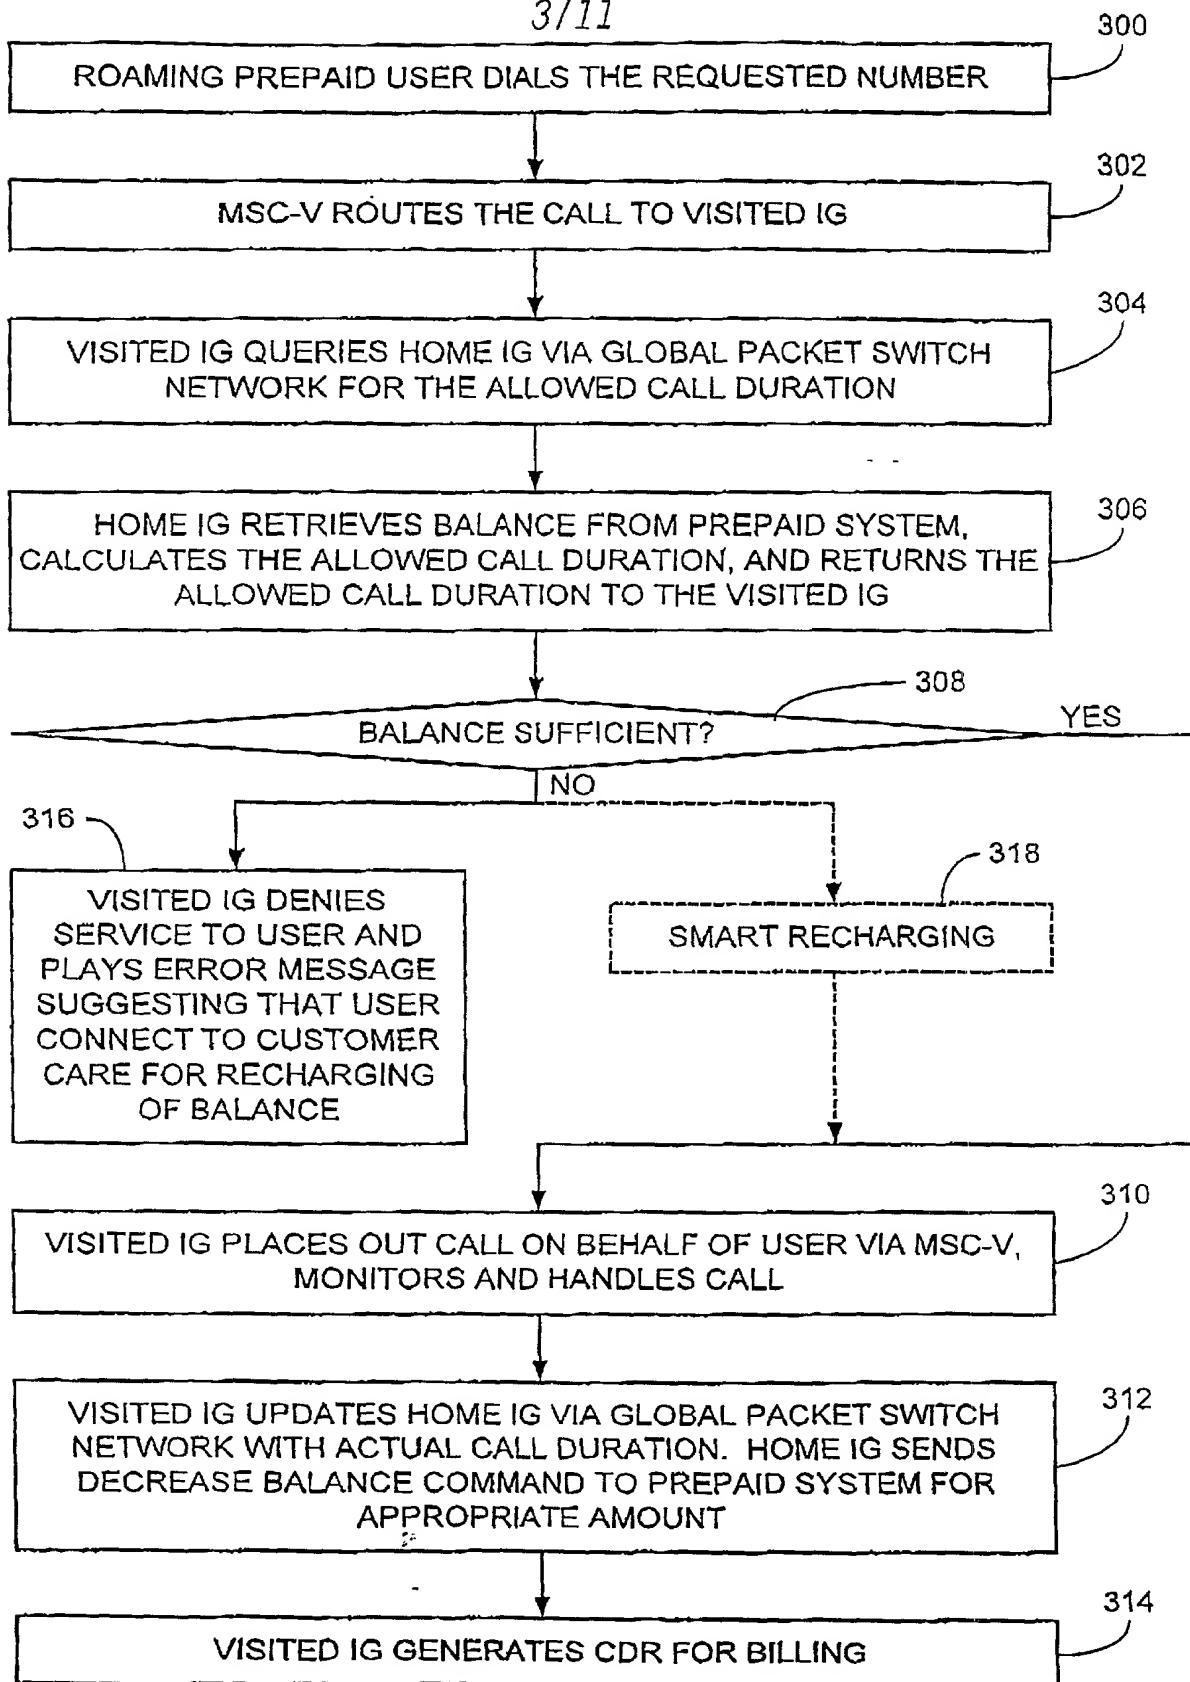


FIG. 3



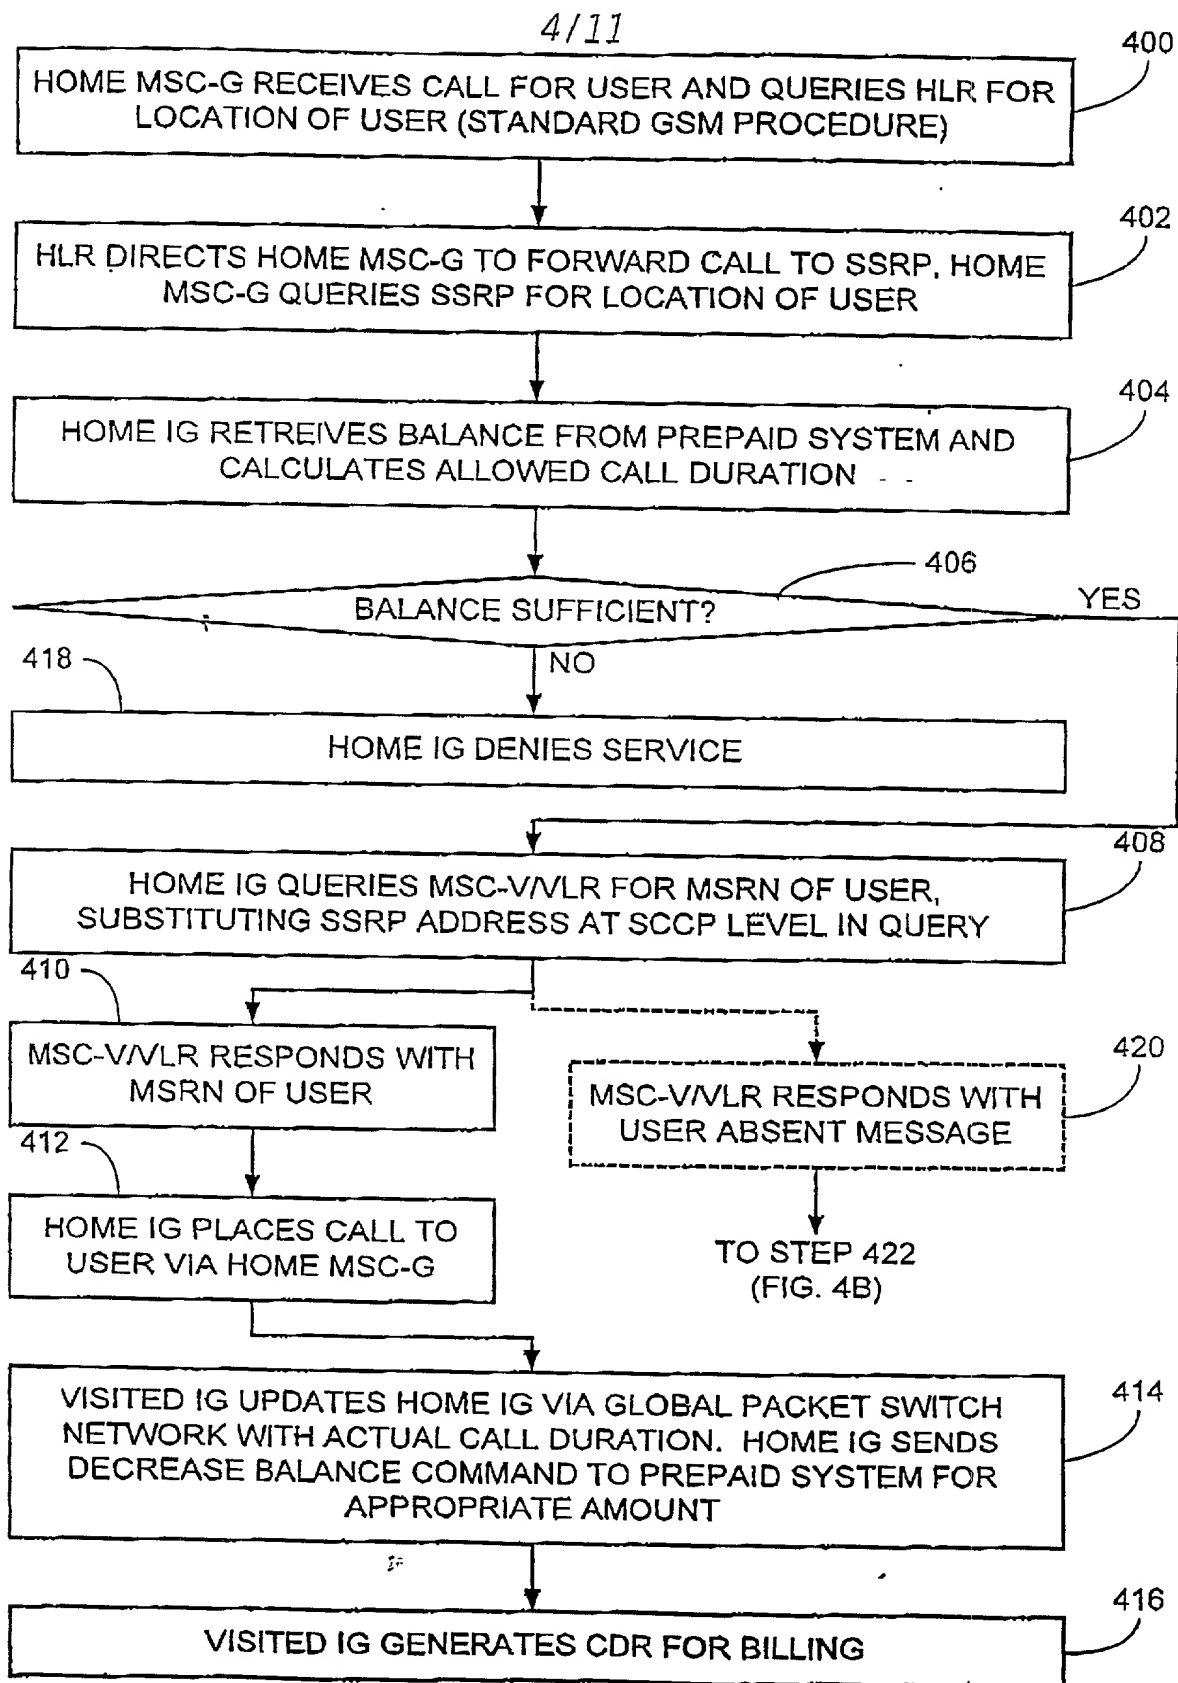


FIG. 4A

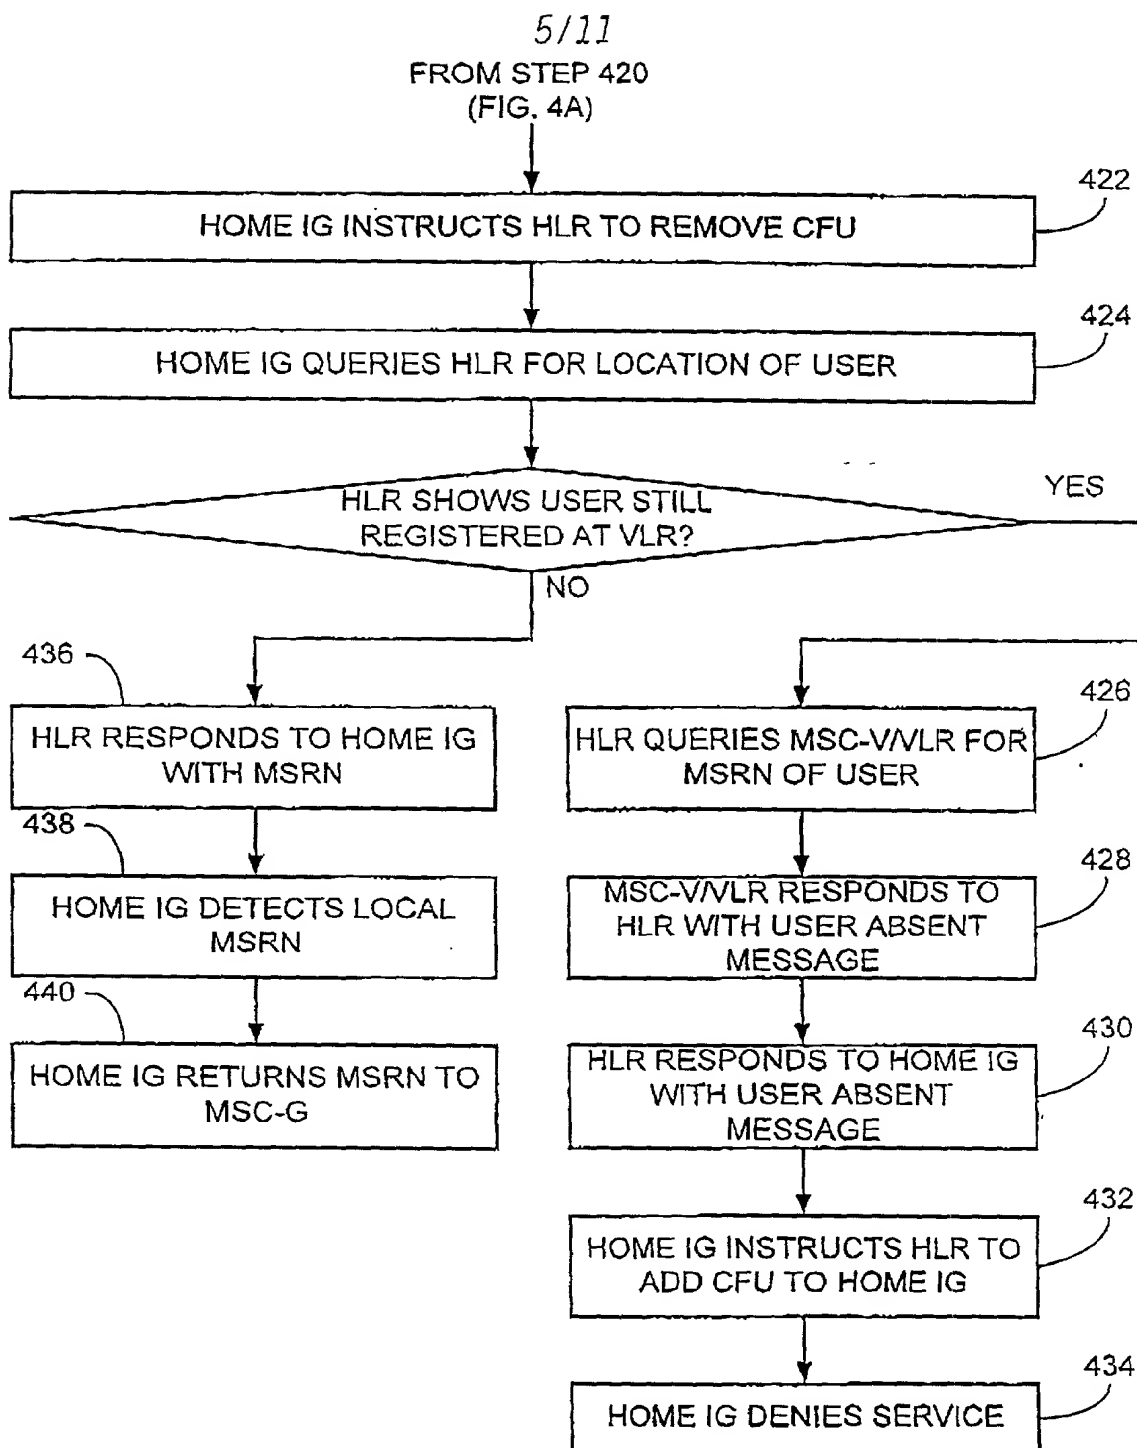


FIG. 4B

6/11

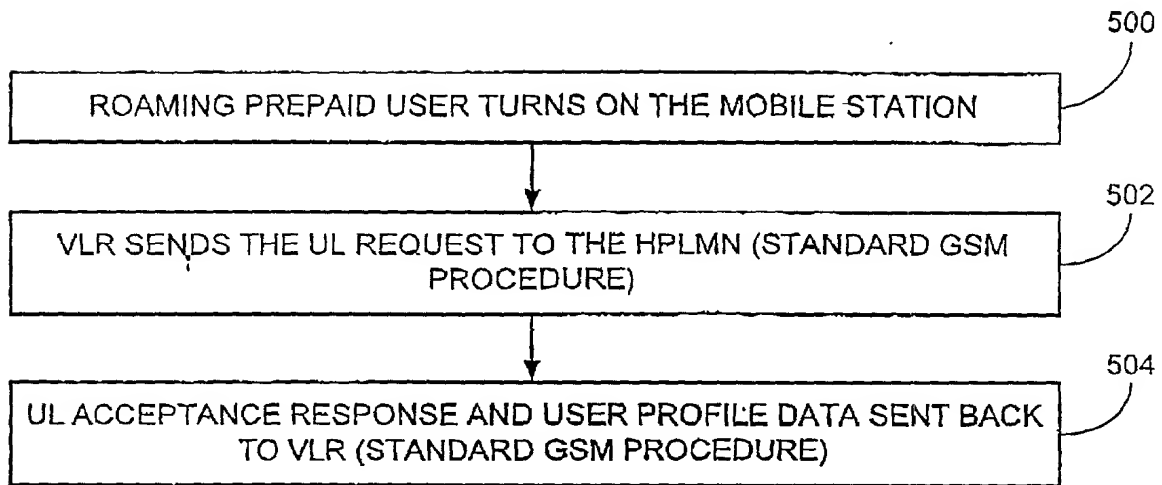


FIG. 5

7/11

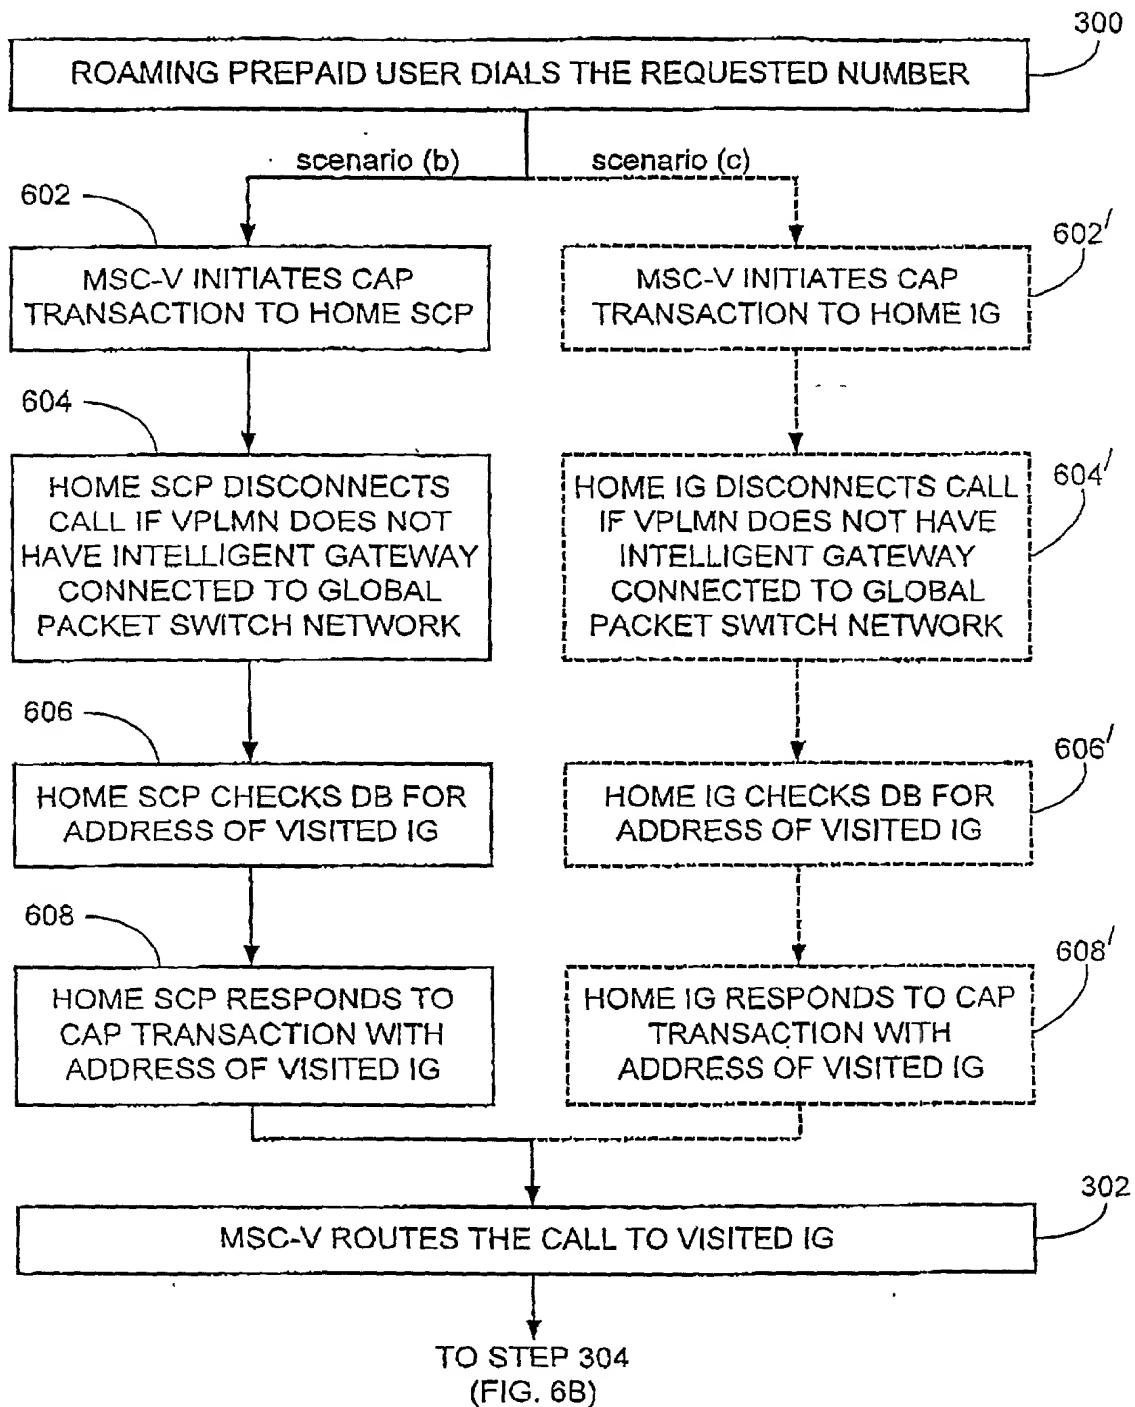


FIG. 6A

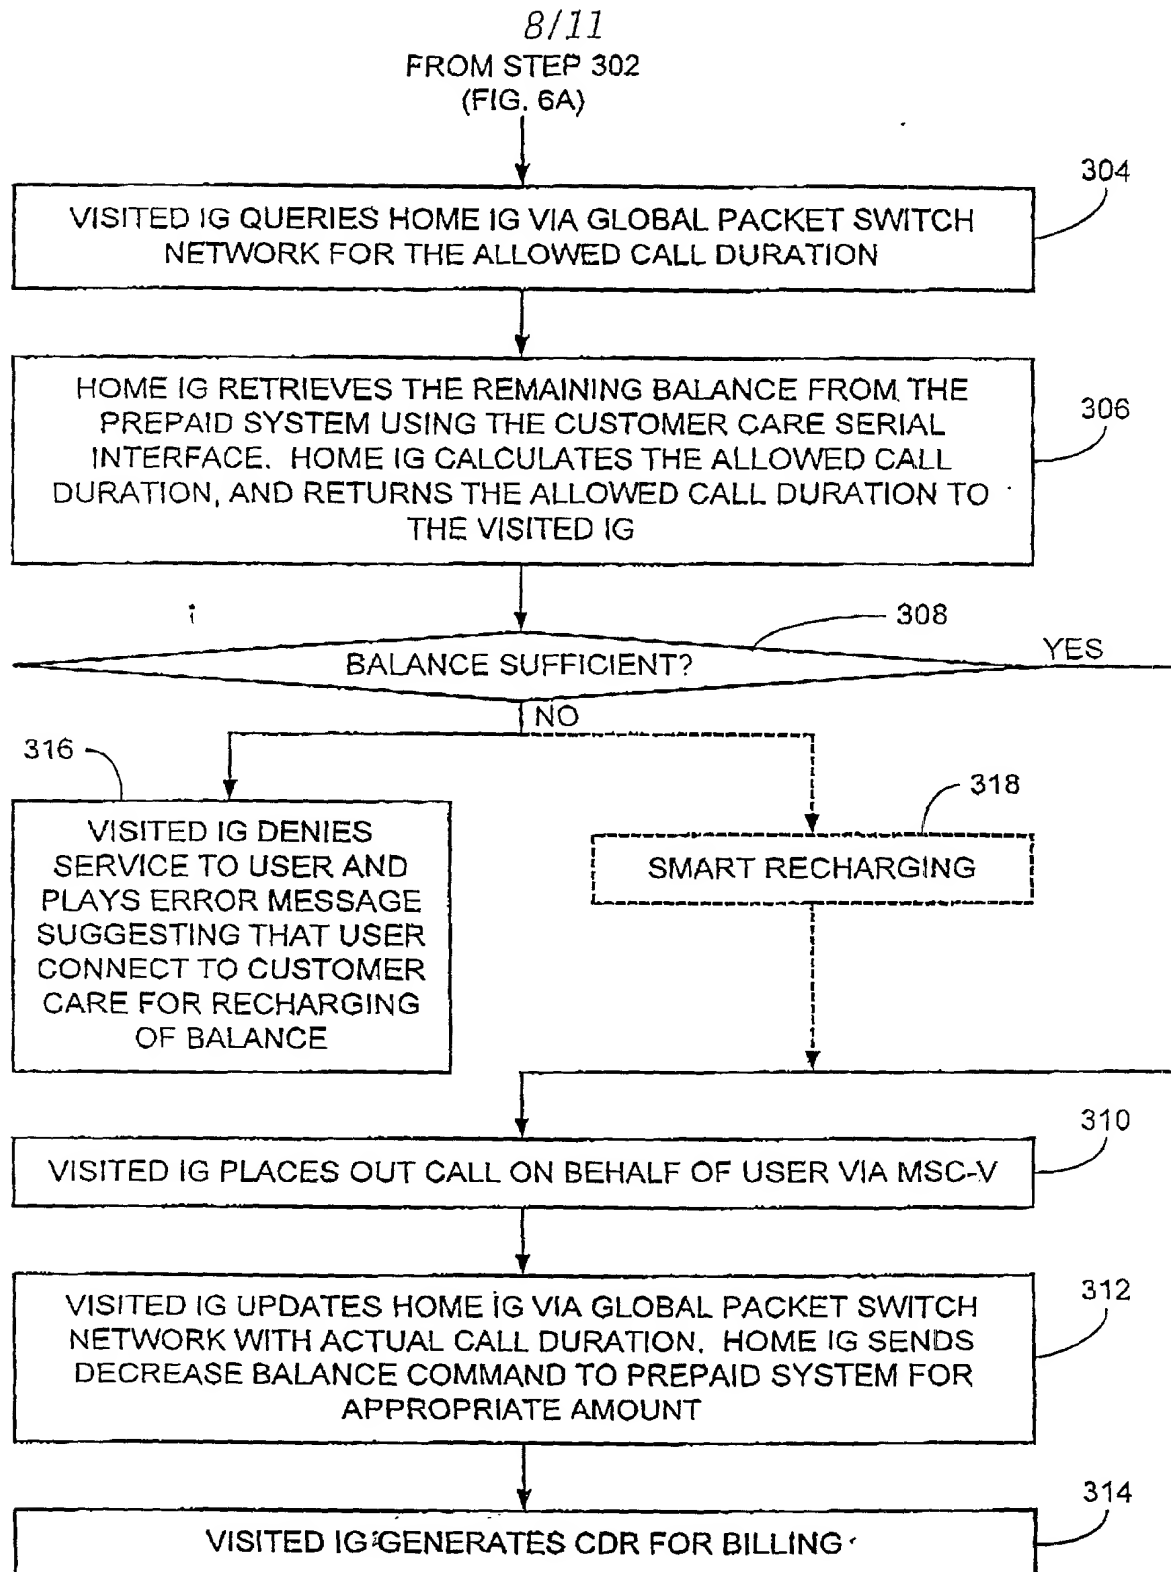


FIG. 6B

9/11

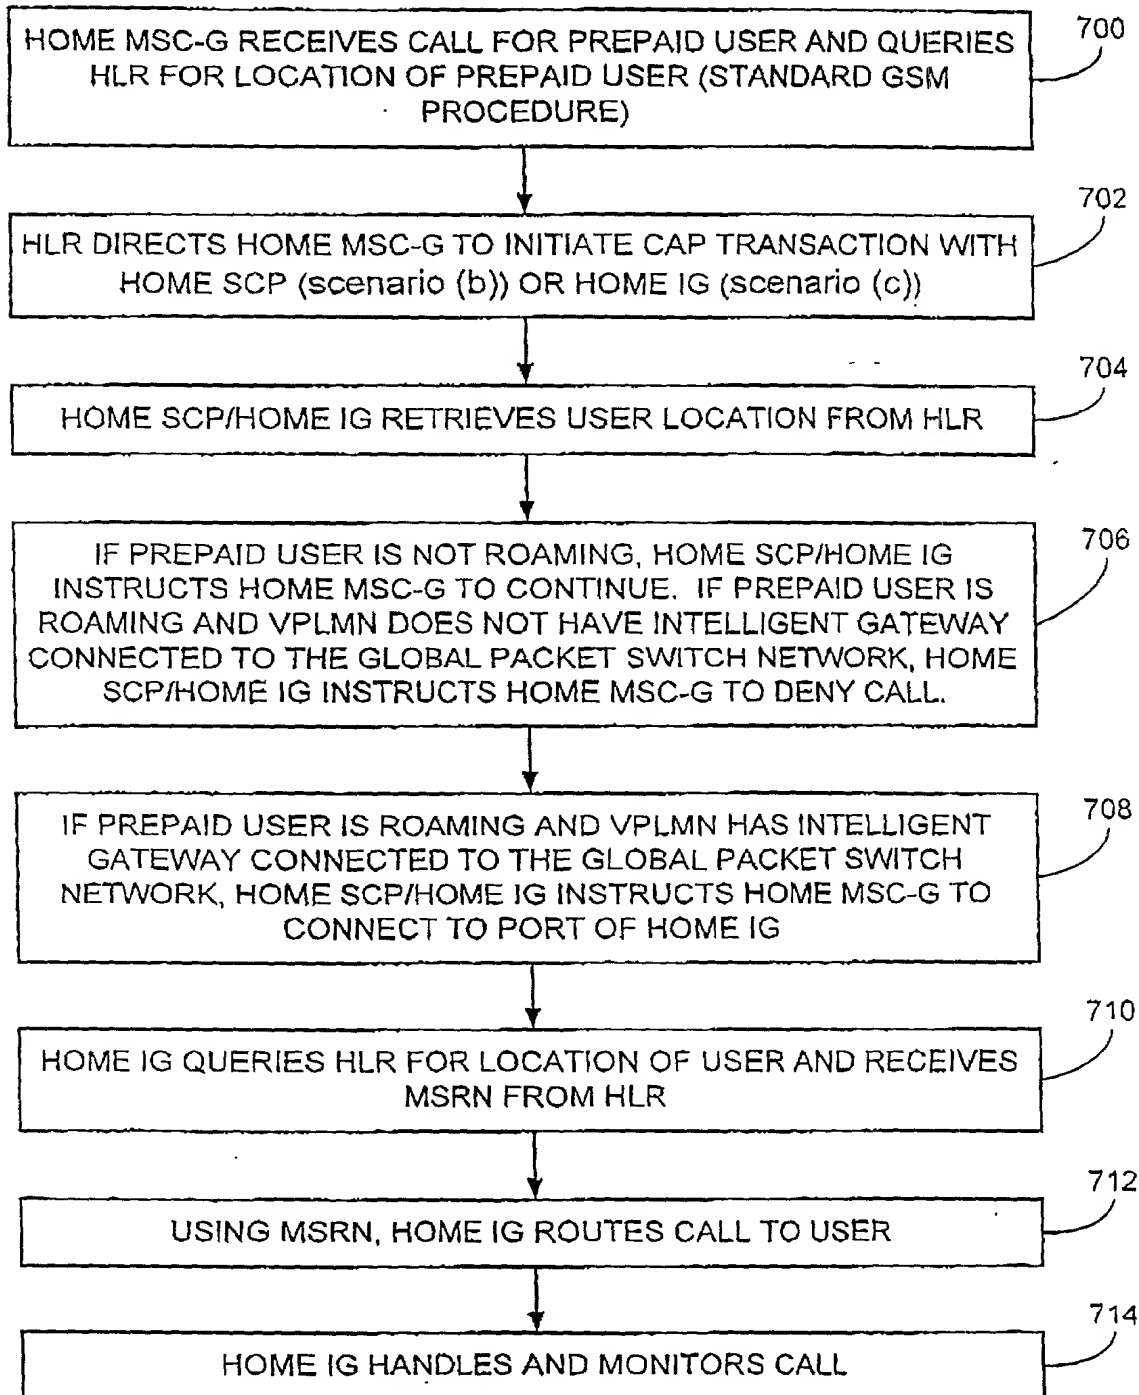


FIG. 7

10/11

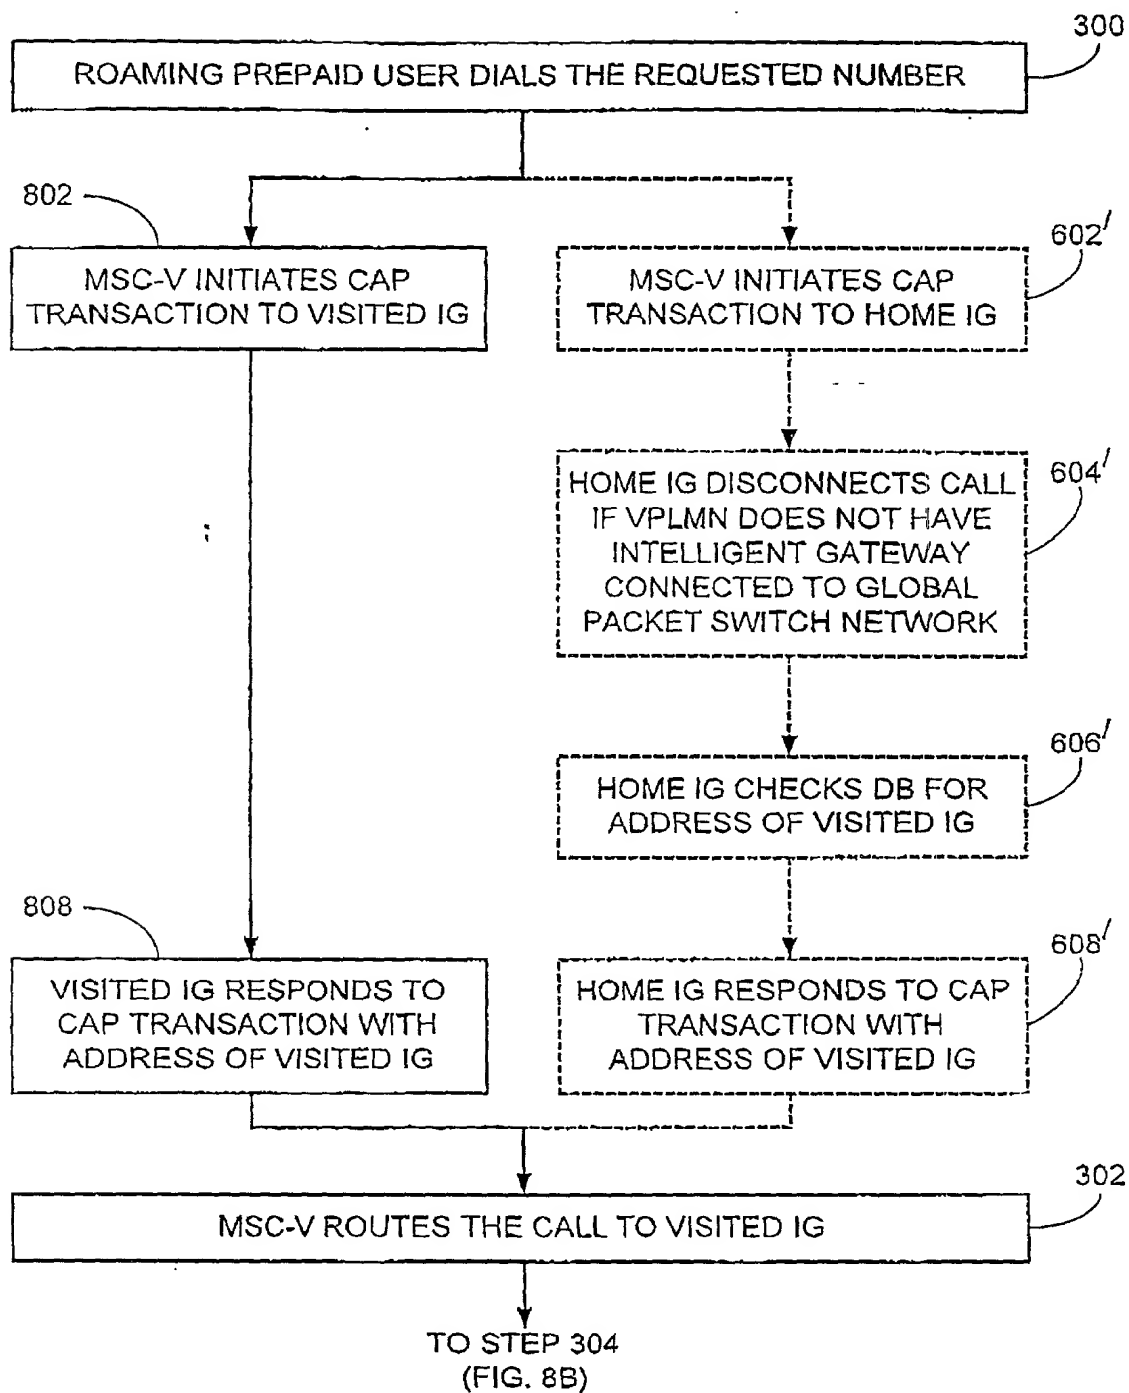


FIG. 8A


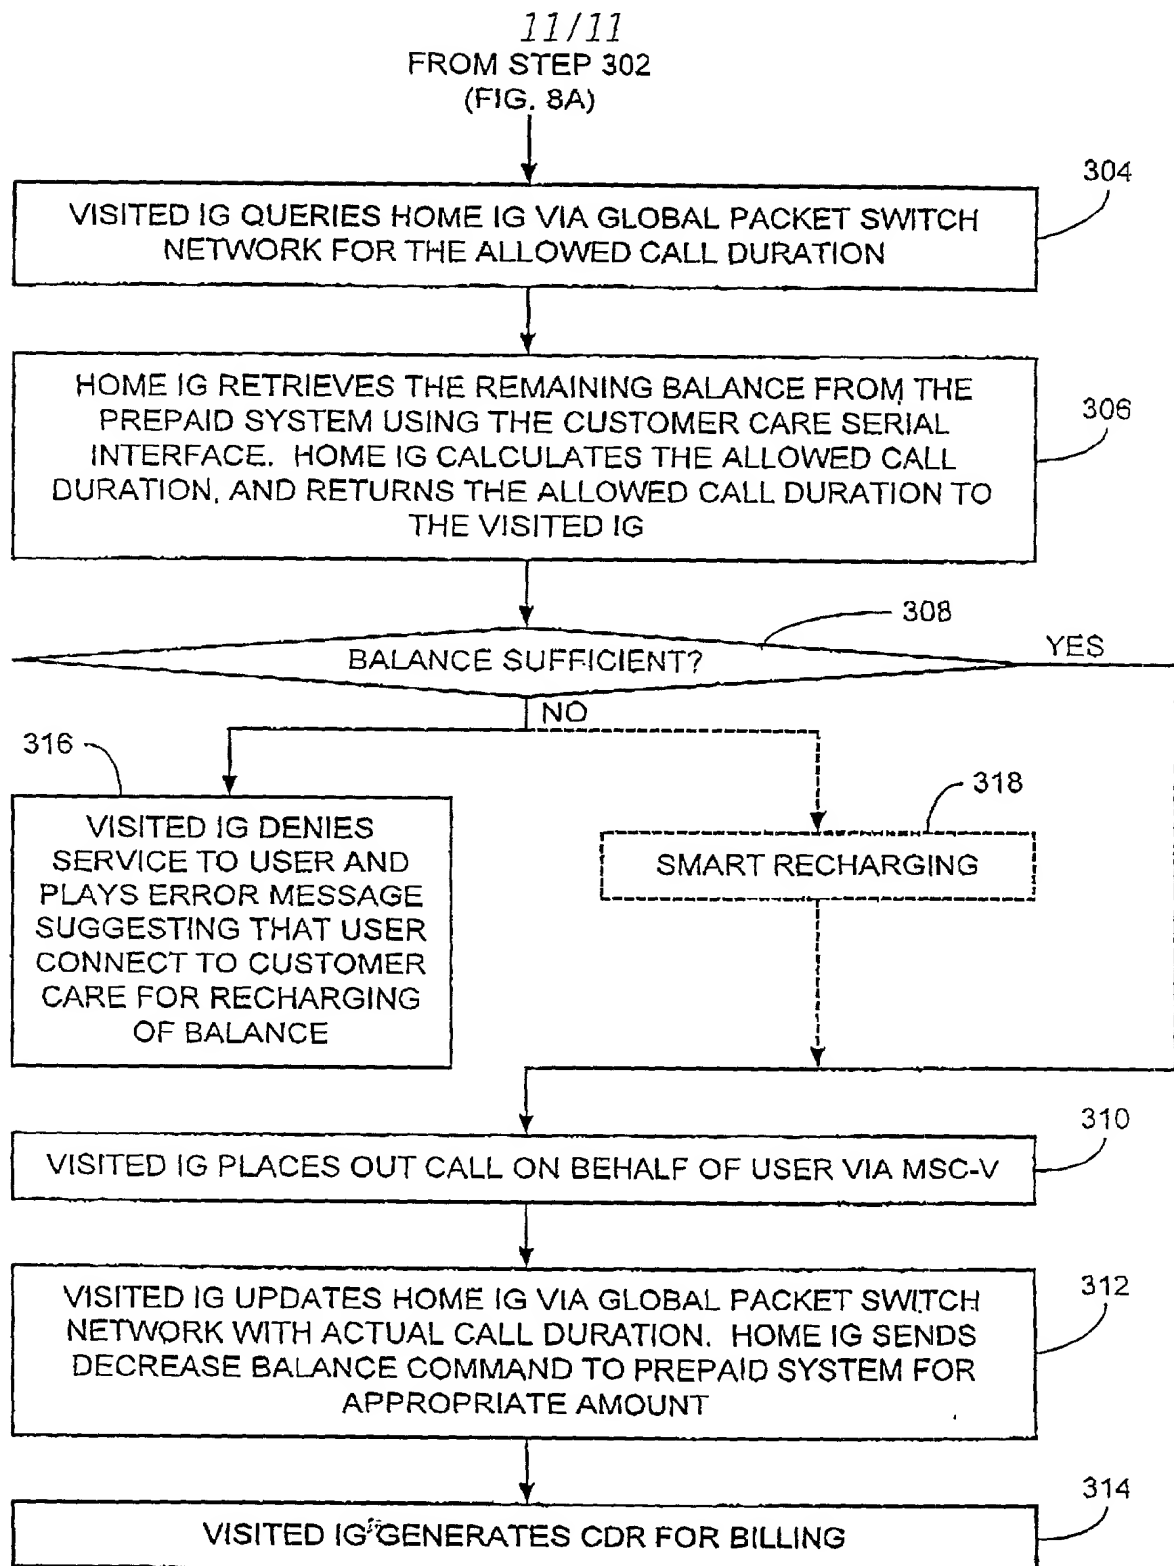


FIG. 8B



Attorney Docket No.: P-2351-US

**DECLARATION AND POWER OF ATTORNEY FOR PATENT APPLICATION**



As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below under my name

I believe that I am the original, first and sole inventor of the subject matter which is claimed and for which a patent is sought on the invention entitled

**SYSTEM AND METHOD FOR ROAMING FOR PREPAID MOBILE TELEPHONE SERVICE**

the Specification of which

- ☐ is attached hereto  
☒ was filed on **March 16, 2000**  
as United States Application Number or PCT International  
Application No. **PCT/IL00/00171**  
and was amended on **November 16, 2000** (if applicable).

I hereby state that I have reviewed and understand the contents of the above-identified Specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to the examination of this application in accordance with Title 37, Code of Federal Regulations, 1.56(a).

I hereby claim foreign priority benefits under Title 35, United States Code, §119 of any provisional application filed in the United States in accordance with 35 U.S.C. §1.119(e), or any application for patent that has been converted to a Provisional Application within one (1) year of its filing date, or any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed.

**PRIOR FILED APPLICATION(S)**

<u>APPLICATION NUMBER</u>	<u>COUNTRY</u>	<u>(DAY/MONTH/YEAR FILED)</u>	<u>PRIORITY CLAIMED</u>
PCT/IL00/00171	PCT	16 March 2000	Yes
60/176,805	US	19 January 2000	Yes
60/124,846	US	17 March 1999	Yes

I hereby claim the benefit under Title 35, United States Code, §120 of any United States application listed below, and, insofar as the subject matter of each of the claims of this application is not disclosed in any prior United States application in the manner provided by the first paragraph of Title 35, United States Code, §112, I acknowledge the duty to disclose material information as defined in Title 37, Code of Federal Regulations, §1.56(a), which occurred

Attorney Docket No.: P-2351-US

between the filing date of the prior application and the national or PCT international filing date of this application:

APPLICATION NO.	FILING DATE (DAY/MONTH/YEAR)	STATUS - PATENTED, PENDING, ABANDONED
PCT/IL00/00171	16 March 2000	Pending
60/176,805	19 January 2000	Pending
60/124,846	17 March 1999	Expired

I hereby appoint as my attorney(s) and agent(s) Heidi M. Brun (Agent, Registration No. 35,104), or Jerome R. Smith, Jr. (Attorney, Registration No. 35,684), or Daniel J. Swirsky (Agent, Registration No. 45, 148) or Mark S. Cohen (Attorney, Registration No. 42, 425) or Rochel L. Abboudi (Agent, Registration No. 44,490) or Suzanne Erez (Agent, Registration No. 46,688) said attorney(s) and agent(s) with full power of substitution and revocation to prosecute this application and transact all business in the Patent and Trademark Office connected therewith.

Please address all correspondence regarding this application to:

EITAN, PEARL, LATZER, & COHEN-ZEDEK  
ONE CRYSTAL PARK, SUITE 210  
2011 CRYSTAL DRIVE  
ARLINGTON, VA 22202-3709

Direct all telephone calls to (703) 486-0600 and all facsimiles at (703) 486-0800.


I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further, that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

FULL NAME OF INVENTOR: SOFER, Carmel

FULL RESIDENCE ADDRESS: 28 Hermon Street, Mevaseret Zion 90805, Israel


COUNTRY OF CITIZENSHIP: Israeli

FULL POST OFFICE ADDRESS: same

SIGNATURE OF INVENTOR 

DATE 13/12/00

Attorney Docket No.: P-2351-US

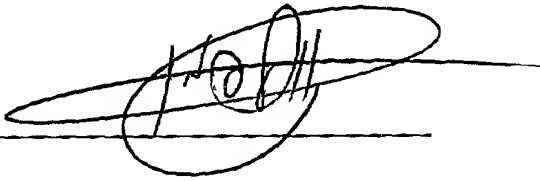FULL NAME OF INVENTOR: WOLFMAN, ShlomoFULL RESIDENCE ADDRESS: 13 Shabtai Street, Hod Hasharon 45257, IsraelCOUNTRY OF CITIZENSHIP: IsraeliFULL POST OFFICE ADDRESS: sameSIGNATURE OF INVENTOR DATE 7 DEC 00FULL NAME OF INVENTOR: BIRAN, OryFULL RESIDENCE ADDRESS: 86 Mordechai Street, Kiriyat Tivon, IsraelCOUNTRY OF CITIZENSHIP: IsraeliFULL POST OFFICE ADDRESS: sameSIGNATURE OF INVENTOR DATE 6/12/00